





Power adapter  
 Input: AC110-240V  
 Output: DC5V, 2.0A

### Description

The VGA UTP IDC Extender Face plate extends the VGA signal and 3.5mm audio up to 1000 feet/300m away from the VGA source using CAT-5/5e/6 Cable. The R02-EXT-35A-FP face plate style 110 type of extender that has built-in buffer and actively regenerates the signals to preserved data integrity. Depending on the application, it supports video resolution between 640X480 to 1920X1440, and perfectly supports high-clear TV resolution. Its receiver has built-in equalization and gain control to adjust brightness.

A	INITIAL RELEASE		05/25/09	
REV	DESCRIPTION OF CHANGE			DATE
TOLERANCE INCHES		M/M		Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		SCALE NONE
DRAWN BY LEO		UNIT	MM	REV A
CHECK BY		DATE	05/25/09	SHEET
APPD BY		TITLE		DWG NO.
		VGA UTP Extender With Audio 110 Type Face Plate		
		PART NO.		R02-EXT-35A-FP



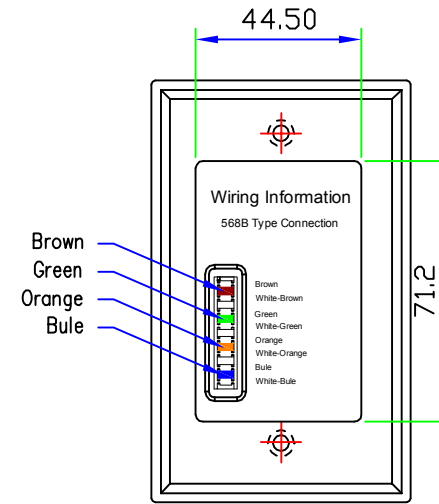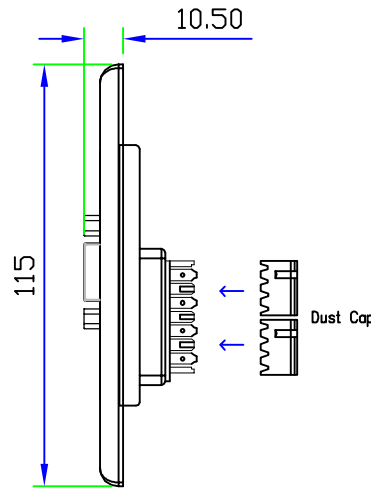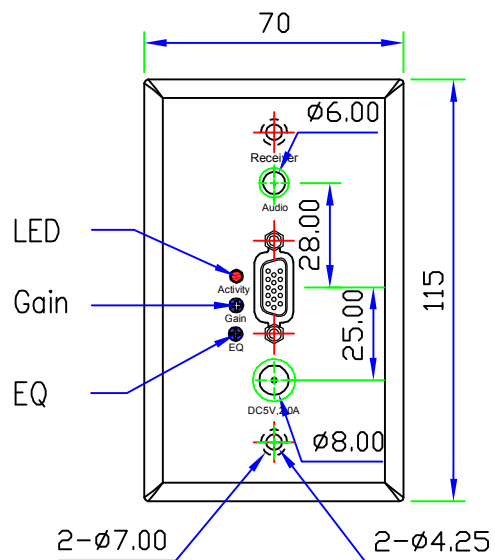

Power adapter  
 Input: AC110-240V  
 Output: DC5V, 2.0A

Specifications:

1. It can extend VGA video and audio up to 1000feet/300m(1024x768-3db)
2. Provides a VGA interface on the transmitter for using locally
3. Use a piece of UTP cable (CAT5, CAT5E, CAT6) to connect local and remote units.
4. Supports VGA video extending, and bandwidth as high as 350M
5. Supports video resolution between 640X480 to 1920X1440, and perfectly supports high-clear TV resolution
6. Transmit VGA video and audio signal without delay
7. No need a driver and easy installation
8. perfect anti-jamming and satisfy any kinds of harsh environment
9. Power Consumption: 10 Watts (max)
10. Power Supply: DC 5V, 2.0A
11. Dimensions:
12. Shell Color: White

A	INITIAL RELEASE		05/25/09	
REV	DESCRIPTION OF CHANGE			DATE
	TOLERANCE INCHES	M/M	<b>TNT</b> Tri-Net Technology, Inc. http://www.trinetusa.com	
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV	A
DRAWN BY	LEO	SHEET	DWG NO.	
		DATE	05/25/09	
CHECK BY		TITLE	VGA UTP Extender With Audio 110 Type Face Plate	
APPD BY		PART NO.	R02-EXT-35A-FP	

