




## VGA FIBER EXTENDER

### DESCRIPTION

VGA Fiber Extender transmitter supports one VGA input, one VGA output and an optic output. VGA Fiber Extender receiver supports an optic input, one VGA output and one DVI output.

### FEATURES

- Support highest resolution of 1600x1200@60Hz up to **500 meters (1,640 feet) using 2 pairs of DLC or 4LC Multi-Mode Fiber Patch Cords.**
- Transmitter's image adjustment in horizontal and vertical way, adjustment of image's sampling clock phase and frequency, adjustment of image's brightness and contrast, adjustment and preservation of all adjustment parameter in all kinds of resolutions.
- Support EDID read of display device and keeps in the system.
- Support the signal input indicates
- Support the optic output indicates
- The input supports the window, easy to use

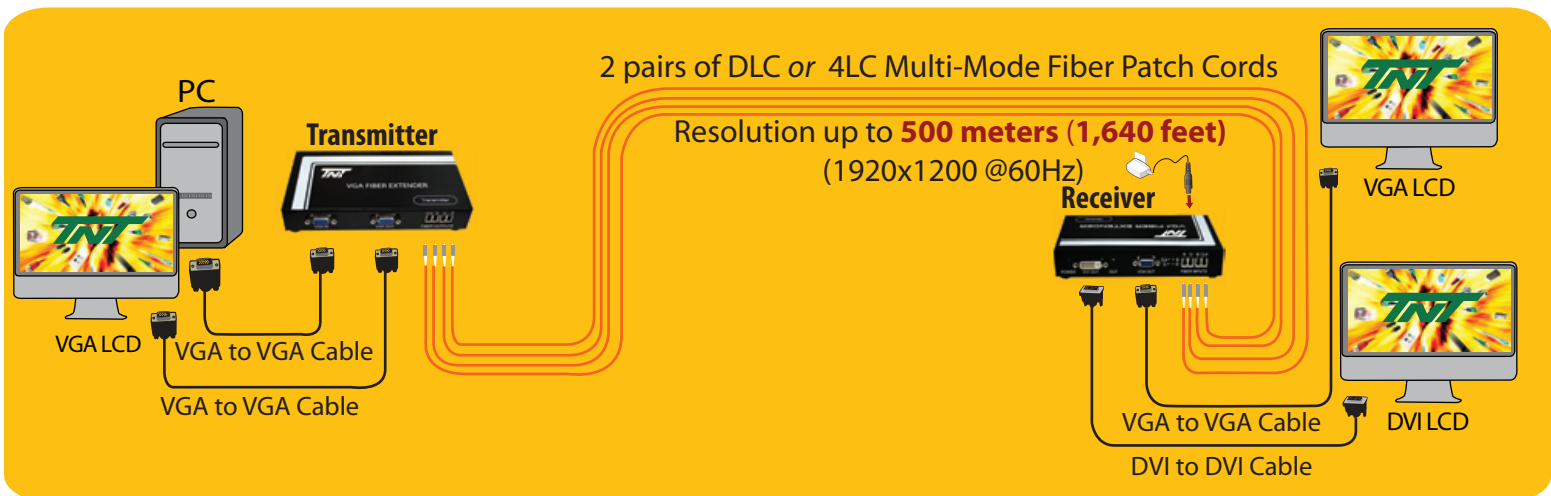

### PART NUMBER

R02-EXT-4FB

### DESCRIPTION

VGA Fiber Extender (Transmitter & Receiver - 1 Set)



**Tri-Net Technology, Inc.**  
*Total Network Telesis* **U.S.A.**

21709 Ferrero Parkway  
Walnut, California 91789  
Tel. 909 598 8818 Fax. 909 594 8666  
www.trinetusa.com info@trinetusa.com