

TNT Product Bulletin

SUN MICROSYSTEMS


(DB13W3) CABLES



DB13W3 to HD15

CABLE: 28 AWG x 3 Coaxial (Spiral Shielded), 75-ohm, UL1354,
24 AWG x 4 Conductors + 24 AWG x 2 Pairs, UL2919
AL-Foil and Braid (85%) Shielded with a Drain Wire, Black PVC Jacket.

CONNECTORS: P1 - High Density D-Sub 15 Pin Male or Female, Solder Type,
Gold Flash Contacts, Molded with Thumb Screws.
P2 - DB 13W3 Male, Solder Type, Gold Flash Contacts, Molded with Thumb Screws.

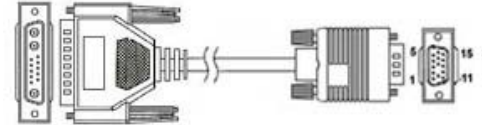

Part Number

E04-13W3M-HD15M-06
E04-13W3M-HD15F-06

Description

DB13W3 Male to HD15 Male, 6 ft Cable
DB13W3 Male to HD15 Female, 6 ft Cable

DB13W3 to DB13W3

CABLE: 28 AWG x 3 Coaxial (Spiral Shielded), 75-ohm, UL1354,
24 AWG x 4 Conductors + 24 AWG x 2 Pairs, UL 2919,
AL-Foil and Braid (85%) Shielded with a Drain Wire, Black PVC Jacket.


CONNECTORS: DB13W3 Male or Female, Solder Type, Gold Flash Contacts,
Molded with Thumb Screws.

Part Number

E01-13W3M-13W3M -06
E01-13W3M-13W3M -10
E01-13W3M-13W3M -15
E01-13W3M-13W3F-06

Description

DB13W3 Male to HD15 Male, 6 ft Cable
DB13W3 Male to HD15 Male, 10 ft Cable
DB13W3 Male to HD15 Male, 15 ft Cable
DB13W3 Male to HD15 Female, 6 ft Cable

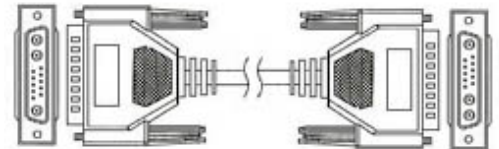

DB13W3 to BNC COAXIAL

CABLE: Four 28 AWG x 3 Coaxial (Spiral Shielded), 75-ohm, Mini-Coaxial, UL1354,
24 AWG x 4 Conductors + 24 AWG x 2 pairs, UL2919,
AL-foil and Braid (85%) Shielded with a Drain Wire, Black PVC Jacket.


CONNECTORS: P1 - BNC Male or Female, Molded
P2 - DB13W3 Male or Female, Solder Type, Gold Flash Contacts,
Molded with Thumb Screws

Part Number

E02-13W3M-4BNCM-01
E02-13W3M-4BNCF-01
E02-13W3F-4BNCM-01
E02-13W3F-4BNCF-01

Description

DB13W3 Male to 4 BNC Male, 1 ft Cable
DB13W3 Male to 4 BNC Female, 1 ft Cable
DB13W3 Female to 4 BNC Male, 1 ft Cable
DB13W3 Female to 4 BNC Female, 1 ft Cable

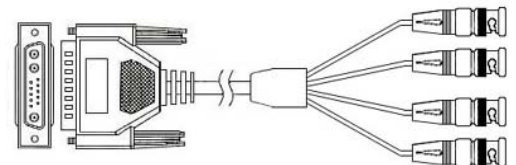

Tri-Net Technology, Inc.

Total Network Telesis

U.S.A.

21709 FERRERO PARKWAY
WALNUT, CALIFORNIA 91789
TEL 909-598-8818 FAX 909-594-8666
www.trinetusa.com info@trinetusa.com