



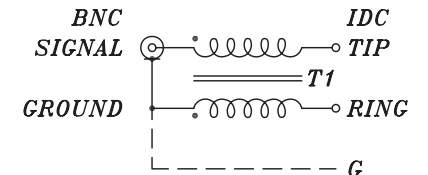

REV.	DESCRIPTION	DATE	APPROVED

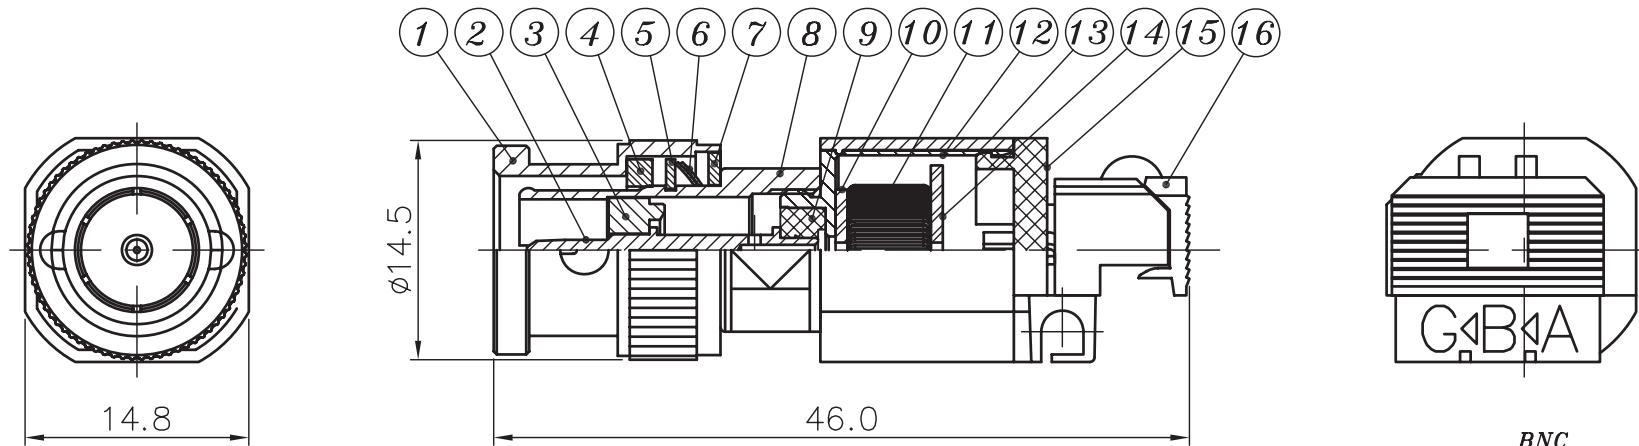

16	IDC SET	PC+30%GF(UL94V-0)	1
15	BALUN REAR CAP	PBT(UL94V-0)	1
14	WASHER	BRASS FINISH NICKEL	1
13	PLASTIC HOUSING	ABS(UL94V-0)	1
12	BARREL	BRASS FINISH NICKEL	1
11	BALUN CORE	1 : 1.26	1
10	INSULATOR WASHER	TEFLON	1
9	INSULATOR	TEFLON	1
8	BODY	BRASS FINISH NICKEL	1
7	WASHER	Fe	1
6	SPRING	SK5	2
5	INNER RETAINING RING	SK5	1
4	GASKET	SILICONE	1
3	INSULATOR	TEFLON	1
2	CENTER PIN	BRASS FINISH GOLD	1
1	SHELL	BRASS FINISH NICKEL	1
NO	DESCRIPTION	MATERIAL	REMARK Q'TY

TECHNICAL SPECIFICATION:

TRANSMISSION BANDWIDTH DC(50Hz) TO 8MHz
 TRANSMISSION DISTANCE 680 METRES (COLOR : CAT 5) MIN.
 780 METRES (MONOCHROME : CAT 5) MIN.
 INSERTION LOSS < 2dB
 SIGNAL RETURN LOSS ≥ -15dB
 COMMON MODE REJECTION ≥ -40dB
 MAXIMUM INPUT 1.0V_{p-p} TYP.

UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: FRACTIONS DECIMALS ANGLES .X ±0.1 ±0.5° .XX ±0.05	CONTRACT NO.			
	APPROVALS	DATE		
MATERIAL	DRAWN MAO	95.07.20	CCTV VIDEO BALUN BNC MALE TO TOOLLESS IDC	
FINISH	CHECKED		SIZE A4	FSCH NO.
	ISSUED		PART NO. M03-BM-110	
DO NOT SCALE DWG.		UNIT mm	SCALE 2 : 1	SHEET OF