




P/N	FT	L	T
C30-3RM-AV-03	3	914mm	±30mm
C30-3RM-AV-06	6	1829mm	±51mm
C30-3RM-AV-12	12	3657MM	+152/-51mm
C30-3RM-AV-75	75	22860mm	+305/-152mm
C30-3RM-AV-100	100	30480mm	+305/-152mm

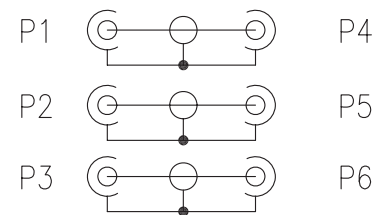

 RCA HOT
 RCA GND

NOTE:

1. NOU-UL [1C*26AWG(13/0.12)+AL/MY+SPIRAL+PVC JACKET BLACK(TNT-BK)]*3F 75ohm
OD=6.0*6.0*6.0±0.15MM
2. P1 & P2 & P3 & P4 & P5 & P6 RCA PLUG,SHELL GOLD PLATED 3u”, INSULATION WHITE.
3. MOLD 45P PVC BLACK(TNT-BK).
4. COLOR RING:60P PVC.
5. 100% ELECTRICAL TESTING.
6. MOLD NO:TNT-RCA-02.



TOLERANCE			Tri-Net Technology, Inc.	
INCHES	M/M	http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	SHEET	1/2
DRAWN BY		WENDI	DATE	05/12/05
CHECK BY		TITLE		
APPD BY		A/V CABLE 3RCA TO 3RCA		
		PART NO.		
		C30-3RM-AV-XX		