


P/N	FT	L	T
C30-SM-2RM-03	3	914mm	±30mm
C30-SM-2RM-06	6	1829mm	±51mm
C30-SM-2RM-12	12	3658mm	+152/-51mm

**NOTE:**

1. NOU-UL [1C\*28AWG(7/0.127)+SPIRAL+PVC]\*2+PVC JACK  
COLOR BLACK MATT OD=6.0±0.15MM
2. NON-UL [1C\*26AWG(13/0.12)+AL/MYLAR+SPIRAL]+PVC JACKET  
COLOR BLACK MATT OD=6.0±0.15MM
3. ø3.5 STEREO MALE PLUG,GOLD PLATED,INSULATION BLACK.
4. RCA PLUG,SHELL GOLD PLATED 3u", INSULATION WHITE.
5. MOLDED 45PVC BLACK(TNT-BK).
6. COLOR RING:60P PVC.
7. 100% ELECTRICAL TESTING.
8. MOLD NO:TNT-DC35-02,TNT-RCA-02,TNT-SR-06.

**PIN OUT:**

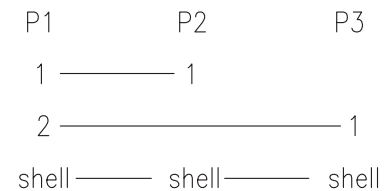

TOLERANCE		INCHES		M/M		<b>TNT</b> Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>			
.X	.015	.30		SCALE	NONE	⊕	▶	REV	A
.XX	.010	.10		UNIT	MM				
.XXX	.005	.05		SHEET	1/2	DWG NO.			
DRAWN BY	WENDI			DATE	05/12/05	TNT-S101-0157			
CHECK BY				TITLE	ST3.5/M TO 2 RCA/M				
APPD BY				PART NO.	C30-SM-2RM-XX				