


P/N	FT	L	T
C30-TL3RM-03	3	914mm	±30mm
C30-TL3RM-06	6	1829mm	±51mm
C30-TL3RM-12	12	3657mm	+152/-51mm

PIN OUT:

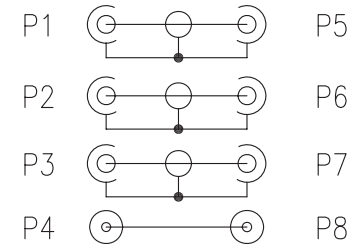

Specification:

- CONN P1/2/3/5/6/7: RCA PLUG,SHELL GOLD PLATED,WHITE PE,BLACK PVC MOLDING.
- CONN P4,P8: TOS-LINK CONNECTOR PBT+30%FUNICLE,SHEER DUST CAP.PVC MOLDING.
- CABLE: RCA CABLE + PLASTIC OPTICAL CABLE,BLACK JACKET,Ø5.0*5.0mm.
- TESTING: Insertion Loss<2.0dB (Test by 660±30nm LED light source/power meter)
Temperature test IL<3.5dB (Test by -25 to 70°C for 30 minutes)
100% ELECTRICAL TESTING.



TOLERANCE		M/M		Tri-Net Technology, Inc.				
INCHES				http://www.trinetusa.com				
.X	.015	.30		SCALE	NONE		REV	A
.XX	.010	.10		UNIT	MM			
.XXX	.005	.05		SHEET	1/2	DWG NO. TNT-S101-0164		
DRAWN BY	WENDI			DATE	05/12/05	TITLE		
CHECK BY				TOSLINK+3 RCA TO TOSLINK+3 RCA				
APPD BY				PART NO. C30-TL3RM-XX				