


APPROVED BY _____

COMPANY: _____

PURCHASING/ENGINEER: _____

DATE: _____

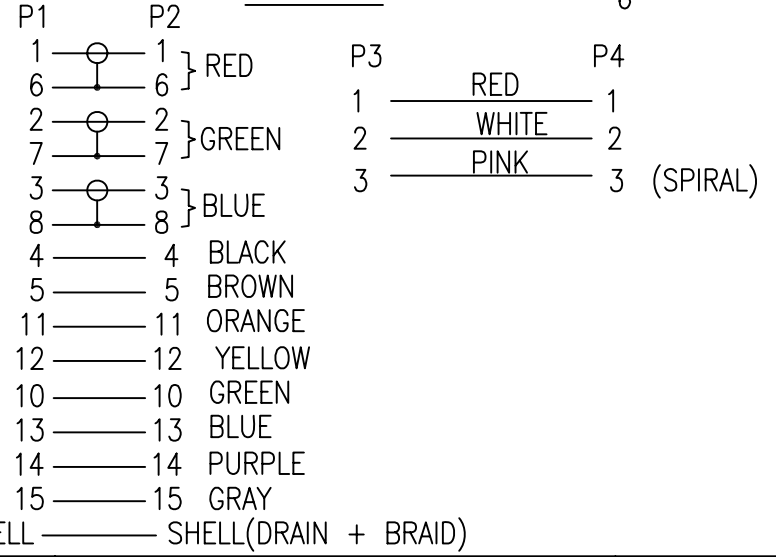

- NOTE:
- CABLE:UL2919 28#*3COAX(UL1354)+28#*11C+AL-FOIL AND BRAID SHIELDED WITH DRAIN WIRE, JACKET: PVC,COLOR: BLACK,OD: 8.0mm. P/N: B-V0311-8-BK-01.
 - CABLE:NON UL, 26AWG*2C+SPIRAL SHIELD,BLACK PVC JACK,OD3.0±0.15mm.
 - CONN:
P1&P2:HIGH DENSITY D-SUB 15PIN MALE: SOLDER TYPE,EMPTY 9PIN, GOLD FLASH CONTACTS, PBT BLACK INSULATION, FRONT NICKEL AND REAR TIN PLATED SHELL.
P3&P4:3.5mm STEREO PLUG,NICKEL PLATED.
 - SCREW:#4-40UNC MOLDED BLACK .
 - ALL HOOD MOLDED BLACK PVC.
 - MOLDED NO.:P1&P2:HD15-01;P3&P4:DC35-01.
 - CABLE ASSEMBLY 100% ELECTRICAL TESTING.

A	INITIAL RELEASE		1/16/08	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES		M/M	Tri-Net Technology, Inc. http://www.trinetusa.com	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	SCALE	NONE
DRAWN BY		UNIT	MM	REV A
CHECK BY		SHEET	1/1	
APPD BY		DATE	1/16/08	DWG NO.
TITLE			HDB15MM WITH 3.5 STEREO MM	
PART NO.			C18-HD15MM-35MM-XX	

