



PIN OUT

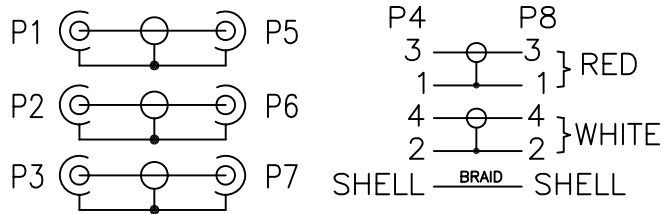

NOTE:

1. NOU-UL [1C\*26AWG(13/0.12)+AL/MY+SPIRAL+PVC JACKET BLACK]\*3F +{[1C\*28AWG(7/0.127)+SP+PVC JACK]\*2C+F+AB+PVC JACKET BLACK}\*1F COLOR BLACK MATT OD=6.0\*6.0\*6.0\*\*6.0\*7.5±0.15MM, 75 OHM.
2. P1&P2&P3&P5&P6&P7 RCA PLUG,SHELL GOLD PLATED 3u", INSULATION WHITE. P4&P8 MD4M,SHELL GOLD PLATED, INSULATION BLACK.
3. MOLD 45PVC BLACK.
- ④ COLOR RING:90P PVC.
5. 100% ELECTRICAL TESTING.
6. MOLD NO:RCA-02,RCA-N02,RCA-CV,MD6M-01,MD6M-N01.

APPROVED BY \_\_\_\_\_  
 COMPANY: \_\_\_\_\_  
 PURCHASING/ENGINEER: \_\_\_\_\_  
 DATE: \_\_\_\_\_

	L	T
	L<=3FT	+50/-50mm
	3FT<L<=15FT	+100/-100mm
	15FT<L<=30FT	+150/-150mm
	L>30FT	+200/-200mm

A		INITIAL RELEASE		08/17/06		
REV		DESCRIPTION OF CHANGE		DATE		
TOLERANCE INCHES		M/M		Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>		
.X	.015	.30	SCALE			NONE
.XX	.010	.10	UNIT			MM
.XXX	.005	.05	REV A			
DRAWN BY		DATE		SHEET 1/1 DWG NO.		
CHECK BY		TITLE		A/V CABLE 3RCAM+MD4M TO 3RCAM+MD4M		
APPD BY		PART NO.		C30-4RM-4RM-XX		

