


PIN OUT

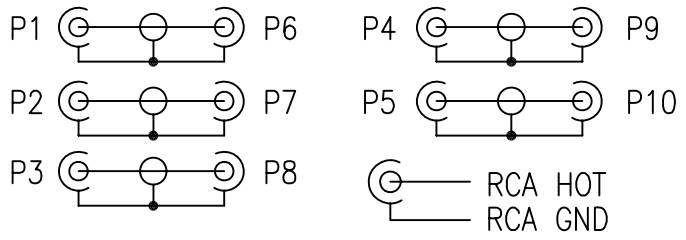

APPROVED BY _____
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

L	T
L ≤ 3FT	+50/-50mm
3FT < L ≤ 15FT	+100/-100mm
15FT < L ≤ 30FT	+150/-150mm
L > 30FT	+200/-200mm

- NOTE:
- NOU-UL [1C*26AWG(13/0.12)+AL/MY+SPIRAL+PVC JACKET BLACK]*5F
OD=6.0*6.0*6.0*6.0*6.0±0.15MM, 75 Ohm.
 - P1 & P2 & P3 & P4 & P5 & P6 & P7 & P8 & P9 & P10 RCA PLUG,
SHELL GOLD PLATED 3u", INSULATION WHITE.
 - MOLD 45PVC BLACK.
 - COLOR RING:90P PVC.
 - 100% ELECTRICAL TESTING.
 - MOLD NO:RCA-02,RCA-CV.



A	INITIAL RELEASE		08/17/06				
REV	DESCRIPTION OF CHANGE		DATE				
TOLERANCE INCHES		M/M					
.X	.015	.30					
.XX	.010	.10					
.XXX	.005	.05	SCALE	NONE		REV	A
DRAWN BY		UNIT	MM				
CHECK BY		SHEET	1/1	DWG NO.			
APPD BY		DATE	08/17/06	TITLE			
		A/V CABLE 5RCA TO 5RCA					
		PART NO. C30-5RM-5RM-XX					