

APPROVED BY \_\_\_\_\_


COMPANY: \_\_\_\_\_

PURCHASING/ENGINEER: \_\_\_\_\_


DATE: \_\_\_\_\_

**NOTE:**

1. CABLE: (28AWG X 3 COAX, EACH COAX SPIRAL SHIELDED, UL1354, COLOR CODE: RED, GREEN, BLUE)+PAPER,BLACK PVC JACKET.OD=7.0±0.15mm.
2. CONNECTOR: P1~P6: BNC MALE, GOLD FLASH CONTACTS, 75 OHM.
3. ALL HOOD & STRAIN RELIEF : MOLDED BLACK PVC.
4. PACKING: EACH CABLE IN A BLANK POLY-BAG.
5. TEST:100% ELECTRICAL TESTING.
6. MOLD NO:P1~P6: BNC-01, SR-11.



**PIN OUT**

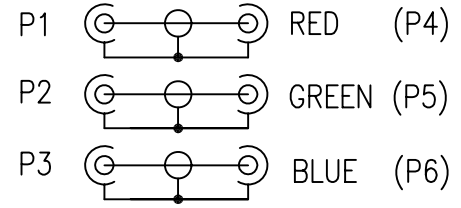

P/N	**	XX	L	T
E07-3BNCM-3BNCM-03	03	3	914	+51/-51
E07-3BNCM-3BNCM-06	06	6	1829	+51/-51
E07-3BNCM-3BNCM-10	10	10	3048	+51/-51
E07-3BNCM-3BNCM-20	20	20	6096	+152/-51
E07-3BNCM-3BNCM-25	25	25	7620	+152/-51
E07-3BNCM-3BNCM-100	100	100	30480	+305/-152

A	INITIAL RELEASE		12/06/06		
REV	DESCRIPTION OF CHANGE		DATE		
TOLERANCE INCHES		M/M	Tri-Net Technology, Inc. <a href="http://www.trinetusa.com">http://www.trinetusa.com</a>		
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05	SCALE	NONE	REV A
		UNIT	MM		
DRAWN BY	Michael		SHEET	1/1	DWG NO.
CHECK BY			DATE	12/07/06	
APPD BY			TITLE	3BNCM TO 3BNCM	
			PART NO.	E07-3BNCM-3BNCM-XX	

