


P/N	FT	T(INCH)
EZ01-A-15	15	+6/-2
EZ01-A-25	25	+6/-2
EZ01-A-35	35	+6/-2
EZ01-A-50	50	+6/-2
EZ01-A-75	75	+12/-6
EZ01-A-100	100	+12/-6
EZ01-A-125	125	+12/-6
EZ01-A-150	150	+12/-6



- NOTE:
- CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, UL1354) + (24AWG X 4C) + (24AWG X 2PAIRS)], AL-FOIL AND BRAID SHIELDED WITH DRAIN WIRE, UL2919, BLACK PVC JACKET, SLOT $\phi 8.5 \pm 0.15$ mm.
 - CONNECTOR: P1 & P2: DIN 14P FEMALE, NICKEL PLATED CONTACTS AND SHELL,
 - SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
 - DIN CAP: BRASS, NICKEL PLATED.
 - ALL HOOD: MOLDED GREEN(GN02) PVC.
 - TESTING: 100% ELECTRICAL TEST .
 - PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
 - MOLD NO.: D14F-N01, D14F-02.

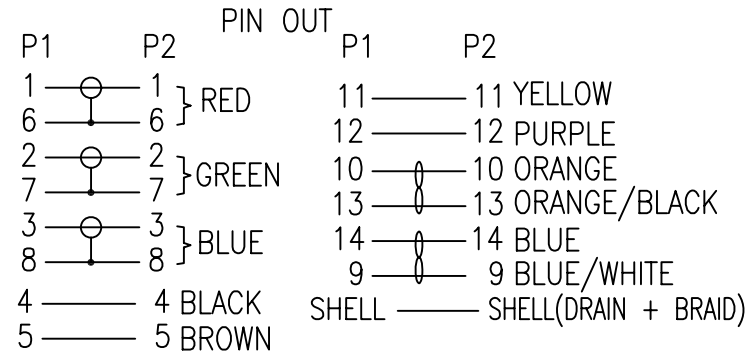

A	INITIAL RELEASE		11/22/07	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			 http://www.trinetusa.com	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	SCALE	NONE
DRAWN BY <i>Lucy</i>			UNIT	MM
			SHEET	1/1
CHECK BY			DATE	11/22/07
			DWG NO.	
APPD BY			TITLE	
			DIN 14/F TO DIN 14/F	
PART NO.			EZ01-A-XX	
			REV A	