


P/N	FT	T(INCH)
EZ02-B-15	15	+6/-2
EZ02-B-25	25	+6/-2
EZ02-B-35	35	+6/-2
EZ02-B-50	50	+6/-2
EZ02-B-75	75	+12/-6
EZ02-B-100	100	+12/-6
EZ02-B-125	125	+12/-6
EZ02-B-150	150	+12/-6



NOTE:

- CABLE: (28AWG X 5 COAX, EACH COAX SPIRAL SHIELDED, UL1354, COLOR CODE: RED, GREEN, BLUE, GREY, BLACK), AL-FOIL AND BRAID(85%) SHIELDED WITH DRAIN, UL2919 + CUL IA FT1, BLACK PVC JACKET. $\phi 9.0 \pm 0.15$ mm CMP TYPE.
- CONNECTOR: P1 & P2: DIN 14P FEMALE, NICKEL PLATED CONTACTS AND SHELL.
- SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
- DIN CAP: BRASS, NICKEL PLATED.
- ALL HOOD: MOLDED ORANGE(OR02) PVC.
- TESTING: 100% ELECTRICAL TEST .
- PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
- MOLD NO.: D14F-N01, D14F-01.

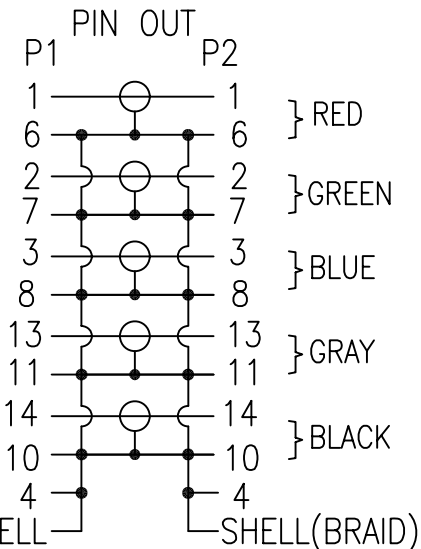

A	INITIAL RELEASE		11/06/07	
REV	DESCRIPTION OF CHANGE			DATE
TOLERANCE INCHES		M/M		Tri-Net Technology, Inc. http://www.trinetusa.com
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		REV A
DRAWN BY	LUCY		SHEET 1/1	DWG NO.
CHECK BY			DATE 11/6/07	
APPD BY			TITLE	DIN 14/F TO DIN 14/F
			PART NO.	EZ02-B-XX