


P/N	FT	T(INCH)
EZ02-C-15	15	+6/-2
EZ02-C-25	25	+6/-2
EZ02-C-35	35	+6/-2
EZ02-C-50	50	+6/-2
EZ02-C-75	75	+12/-6
EZ02-C-100	100	+12/-6

NOTE:


- 1.CABLE:UL20276 (28AWG*1P+D-Free-edge-AL)*4C+28AWG*1P+28AWG*5C+AB JACKET COLOR:BLACK OD:7.3±0.15mm,CMP TYPE.
- 2.CONNECTOR: P1&P2: DIN 19P FEMALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL.
- 3.DIN CAP:BRASS,NICKEL PLATED.
- 4.ALL HOOD: MOLDED YELLOW 45P PVC.
- 5.SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
- 6.100% OPEN AND SHORT TESTING.
- 7.MOLD NO: D14F-N01, D14F-01.



WIRE CONNECTION

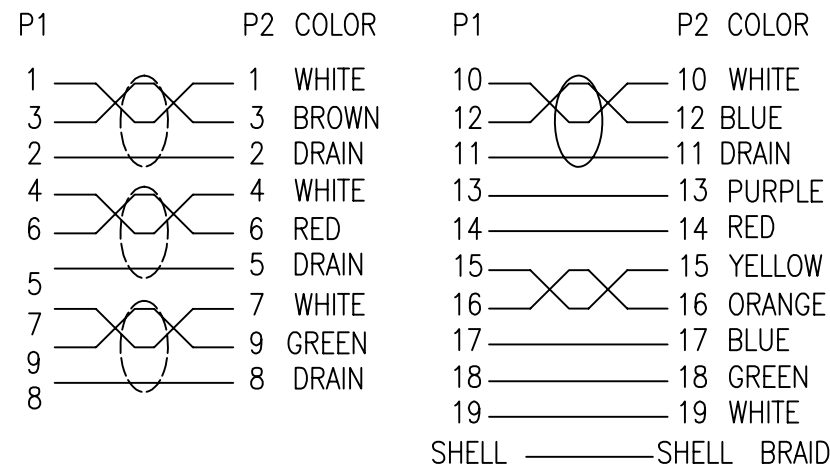

A	INITIAL RELEASE		11/22/07	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES		M/M	Tri-Net Technology, Inc. http://www.trinetusa.com	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	SCALE	NONE
DRAWN BY		LUCY	UNIT	MM
CHECK BY			SHEET	1/2
APPD BY			DATE	11/22/07
		TITLE	DIN19F TO DIN19F 28AWG	
		PART NO.	EZ02-C-XX	

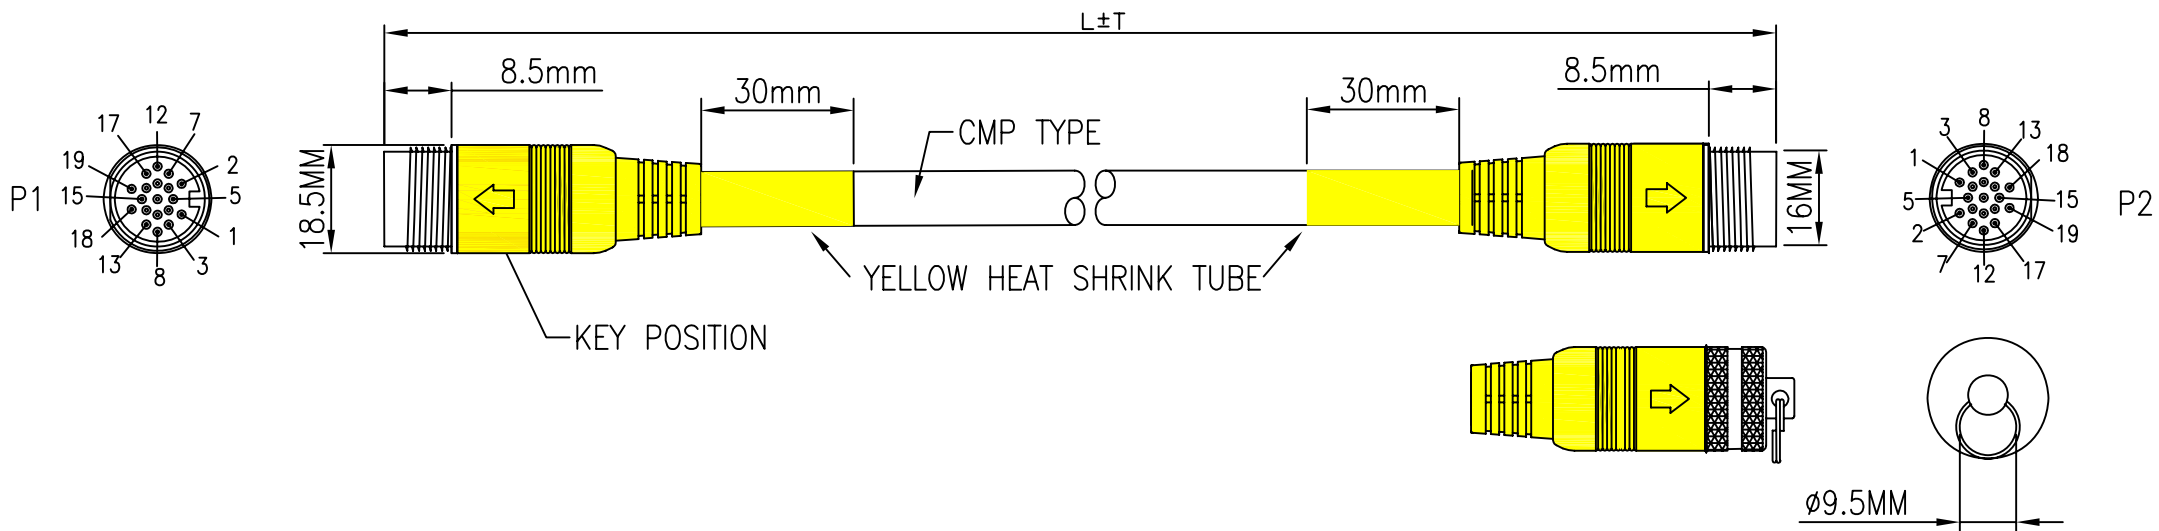

P/N	L(MM)	T(MM)
EZ02-C-125	125	+12/-6
EZ02-C-150	150	+12/-6

P1	P2	COLOR	P1	P2	COLOR
1	1	WHITE	10	10	WHITE
3	3	BROWN	12	12	BLUE
2	2	DRAIN	11	11	DRAIN
4	4	WHITE	13	13	PURPLE
6	6	RED	14	14	RED
5	5	DRAIN	15	15	YELLOW
7	7	WHITE	16	16	ORANGE
9	9	GREEN	17	17	BLUE
8	8	DRAIN	18	18	GREEN
			19	19	WHITE
			SHELL	SHELL	BRAID

NOTE:

- 1.CABLE:UL20276 (24AWG*1P+D-Free-edge-AL)*4C+24AWG*1P+24AWG*5C+AB JACKET COLOR:BLACK OD:10±0.15mm,CMP TYPE.
- 2.CONNECTOR: P1&P2: DIN 19P FEMALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL.
- 3.DIN CAP:BRASS,NICKEL PLATED.
- 4.ALL HOOD: MOLDED YELLOW PVC.
- 5.SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
- 6.100% OPEN AND SHORT TESTING.
- 7.MOLD NO: D14F-N01, D14F-01.



A	INITIAL RELEASE		11/22/07	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE		Tri-Net Technology, Inc. http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV A	
DRAWN BY	LUCY		SHEET	2/2
CHECK BY			DATE	11/22/07
APPD BY			TITLE	DIN19F TO DIN19F 24AWG
			PART NO.	EZ02-C-XX