


P/N	L(FT)	T(INCH)
EZ03-DVID-01	1	+1/-1
EZ03-DVID-03	3	+1/-1
EZ03-DVID-06	6	+2/-2
EZ03-DVID-10	10	+2/-2

WIRE CONNECTION

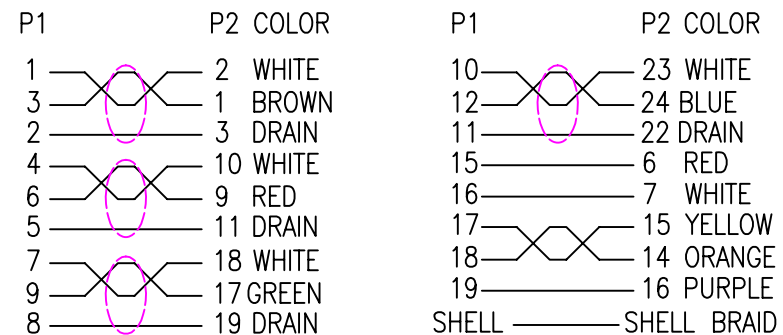

NOTE:

1.CABLE:UL20276 (28AWG*1P+D-Free-edge-CL)*4C+28AWG*1P+28AWG*5C+AB JACKET COLOR: BLACK OD:7.3±0.15mm.

2.CONNECTOR:

P1: DIN 19P MALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL, LOCKER TYPE.

2: DVI 18+1 MALE,PIN:G/F,INSULATION WHITE, NICKEL PLATED SHELL.

4. SCREW MOLDED BLACK PVC.

5. SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.

6. P1 MOLDED 45P YELLOW(YL02) PVC,P2 MOLDED 45P BLACK PVC.

7. TESTING: 100% ELECTRICAL TEST .

8. MOLD P/N: DVI-01, D14M-N01, D14M-02.



A		INITIAL RELEASE		11/22/07	
REV		DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES M/M			Tri-Net Technology, Inc. http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE	REV A
.XX	.010	.10	UNIT	MM	
.XXX	.005	.05	SHEET	1/1	DWG NO.
DRAWN BY		Walt	DATE	11/22/07	
CHECK BY		TITLE DIN 19/M TO DVI18+1 M			
APPD BY		PART NO. EZ03-DVID-XX			