


P/N	L(FT)	T(INCH)
EZ03-HD15-01	1	+1/-1
EZ03-HD15-03	3	+1/-1
EZ03-HD15-06	6	+2/-2
EZ03-HD15-10	10	+2/-2

PIN OUT

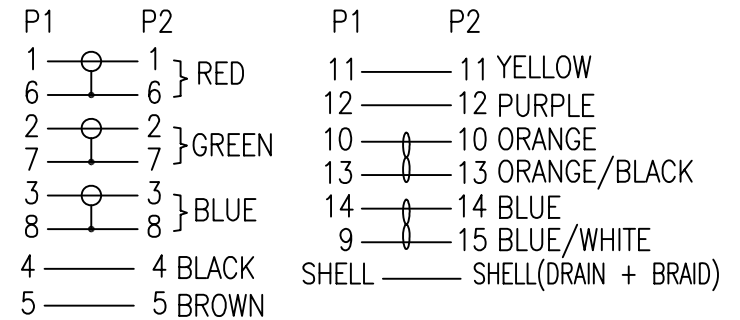

NOTE:

- CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, UL1354) + (24AWG X 4C) + (24AWG X 2PAIRS)], AL-FOIL AND BRAID SHIELDED WITH DRAIN WIRE, UL2919, BLACK PVC JACKET, SLOT $\varnothing 8.5 \pm 0.15$ mm.
- CONNECTOR:
P1: DIN 14P MALE, NICKEL PLATED CONTACTS AND SHELL, LOCKER TYPE.
P2: HIGH DENSITY D-SUB 15PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, 9PIN UNLOADED, NICKEL PLATED SHELL.
- THUMB SCREW TO BE MOLDED BLACK.
- SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
- P1: MOLDED GREEN(GN02) PVC. P2: MOLDED BLACK PVC.
- TESTING: 100% ELECTRICAL TEST .
- PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
- MOLD P/N: HD15-N01, HD15-01, D14M-N01, D14M-02.



A	INITIAL RELEASE		11/22/07	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE		Tri-Net Technology, Inc.		
INCHES M/M		http://www.trinetusa.com		
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	REV A	
DRAWN BY	Walt			
CHECK BY			DATE	11/22/07
APPD BY			TITLE	DIN14M TO HD15M
			PART NO.	EZ03-HD15-XX