



APPROVED BY _____
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____



NOTE:

1. CABLE: UL2919 28AWG(7/0.127)*3COAX(OFC)+PAPER+JACKET.JACKET COLOR: BLACK MATT PVC AND OD=7.0±0.15MM.
2. CONNECTOR: P1: DIN 14P MALE, NICKEL PLATED CONTACTS AND SHELL,LOCKER TYPE. P2, P3, P4: RCA FEMALE: NICKEL PLATED CONTACTS AND SHELL, SOLDER TYPE.
3. PLASTIC FACE PATE:3PORTS.WHITE PAINTED.
4. P1 SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
5. DIN 14P MOLDED 45P BLACK PVC,RCA FEMALE MOLDED 25P WHITE(WH05) PVC,
6. TESTING: 100% ELECTRICAL TEST.
8. PACKING: EACH CABLE IN A BOX.
9. MOLD NO.: D14M-N01, D14M-02, RCA-N06,RCA-06,SR-11.

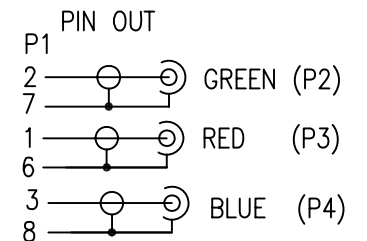

A	INITIAL RELEASE		11/24/08	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			Tri-Net Technology, Inc. http://www.trinetusa.com	
INCHES				
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05	SCALE	NONE
			UNIT	MM
DRAWN BY			SHEET	1/3
Carl			DATE	11/24/08
CHECK BY			TITLE	
			DIN 14/M TO 3RCA/F+FACE PLATE	
APPD BY			PART NO.	
			EZ04-RWY-FP	