


**WIRE CONNECTION**

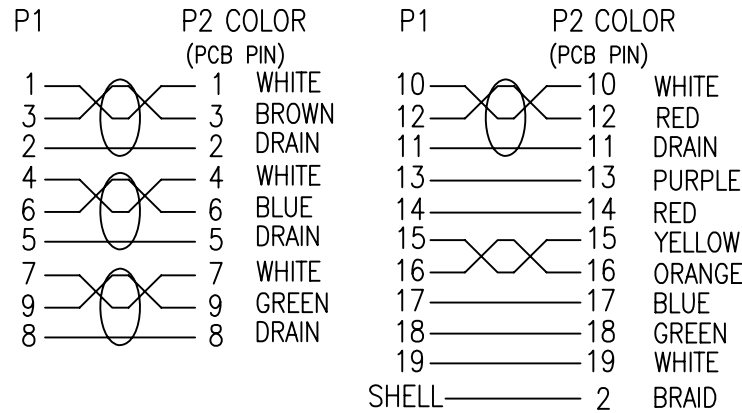


APPROVED BY \_\_\_\_\_

COMPANY: \_\_\_\_\_

PURCHASING/ENGINEER: \_\_\_\_\_

DATE: \_\_\_\_\_

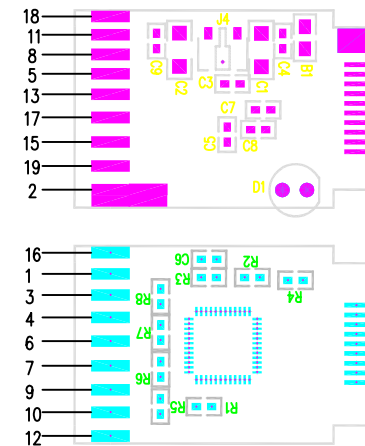

- NOTE:**
- CABLE:HDMI1.3 UL20276 (28AWG\*1P+AL+D+MYLAR)\*4C+28AWG\*1P+28AWG\*5C+AB JACKET COLOR:BLACK OD:6.5±0.15mm.
  - CONNECTOR:P1:HDMI 19P MALE,SOLDER TYPE,GOLD PLATED CONTACTS,INSULATION:BLACK,GOLD PLATED SHELL.  
P2: HDMI 19P FEMALE WITH HDMI 19P EXTENDER,1.3 Rev.
  - Extends TMDS interface Length as follows:
    - 0 to 45 meters over HDMI cable,24 AWG STP
    - 0 to 36 meters over HDMI cable,28 AWG STP
    - 0 to 30 meters over HDMI cable,30 AWG STP
  - P1 AND SR:MOLDED BLACK 45P PVC.  
P2:ASSEMBLY HOOD,MATERIAL:ABS.
  - MOLD NO::HDMI-N01-IDC,HDMI-01,COVER-HDMI,HOOD-HDMI EQ.

B	CHANGE HDMI PIG TAIL MOLD TO ASSEMBLY HOOD	01/19/08
A	INITIAL RELEASE	11/07/07
REV	DESCRIPTION OF CHANGE	DATE
TOLERANCE INCHES		M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
DRAWN BY	Walt	SHEET 1/1
CHECK BY		DATE 01/19/08
APPD BY		TITLE HDMI19M TO HDMI19F(EQ.) 1.3 Rev
		PART NO. R01-EQL-MF-XX-B

