

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMBILITY RATING UL 94V-0.

CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.


TIN PLATING OVER NICKEL IN SOLDER AREA.

6u" P/N 3101213600

15u" P/N 3101213700

30u" P/N 3101213800

50u" P/N 3101213900

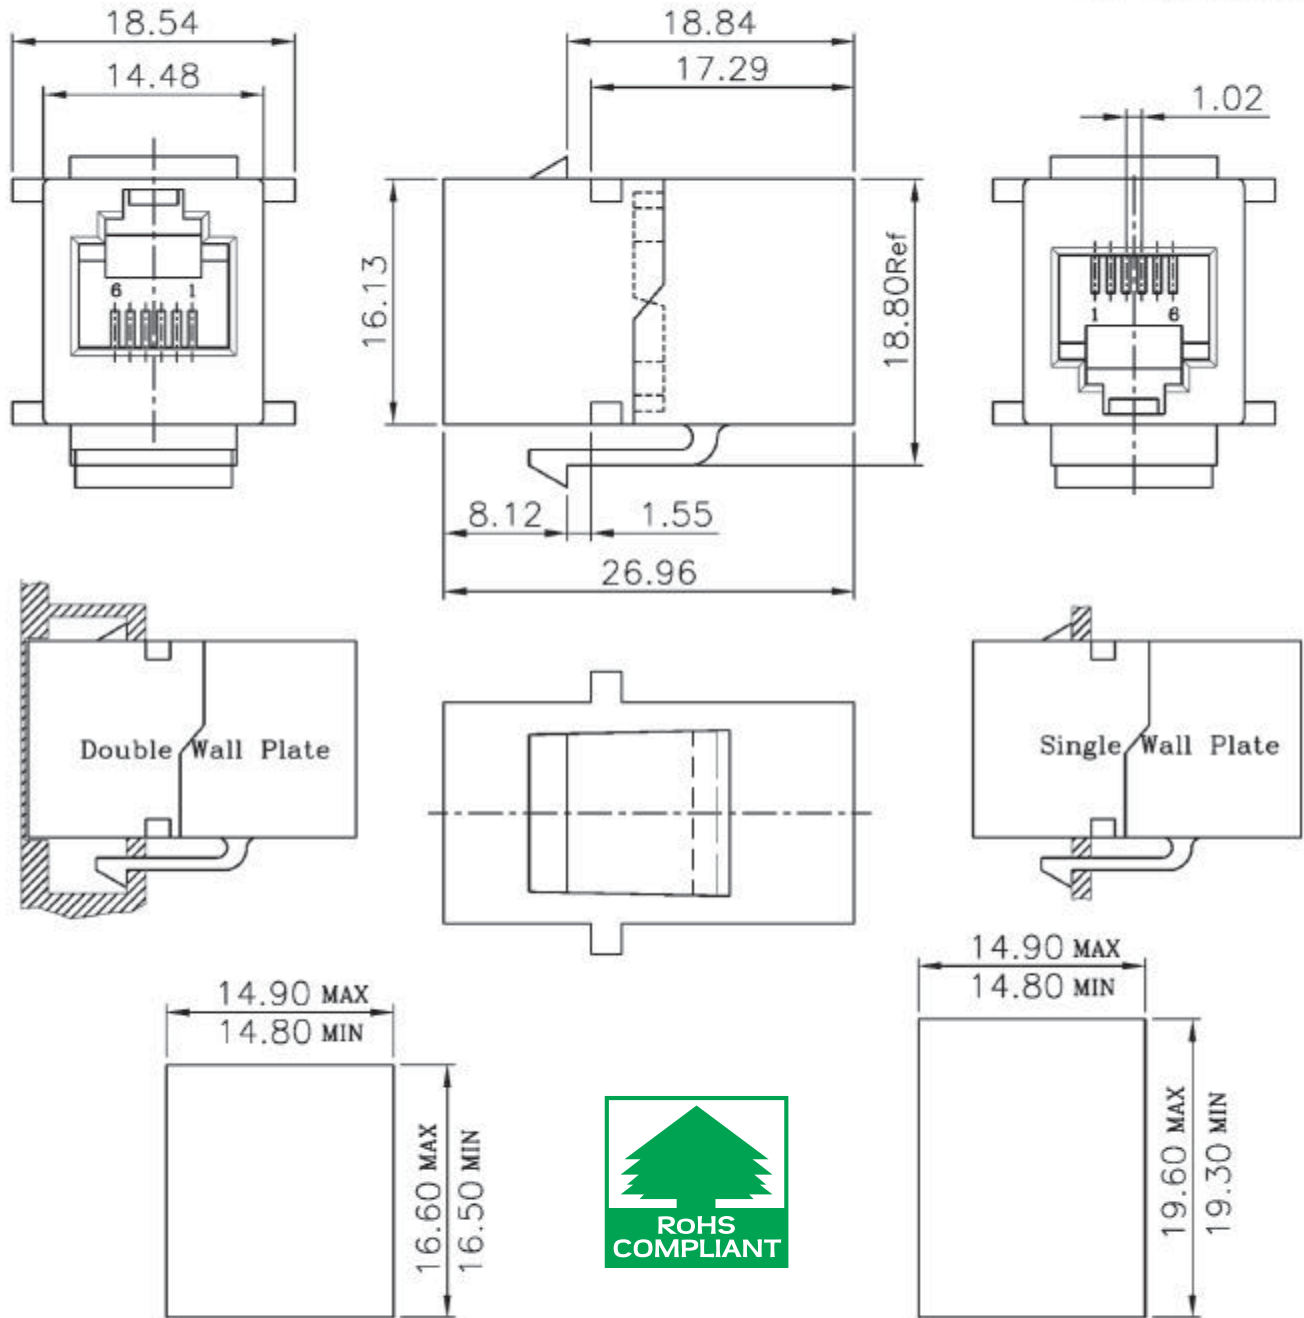

Front Panel Jack Only Clearance
 W/O Latch Feature

Single Panel-Latch Clearance
 Panel Thickness 0.062 inch

修正 REVISION	日期 DATE	容許公差 TOLERANCE	品名 MODULAR COUPLER JACK ARTICLE UNSHIELDED(6P6C)			
		.XXX ±0.10	圖號 080-66S-SI			
		.XX ±0.25	DWG NO.			
		.X ±0.38	單位 UNIT 比例 SCALE 張數 SHEET 版本 REV.			
		X ±0.50	mm 2/1 1/1 B			
⚠ 開新模修正圖面膠殼溝槽數量(8溝→6溝) 90-02-24 徐		核准 APPD.				
		校對 CHKD.				
		設計 DR. Hsu 88-01-04				