




MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.


CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
 TIN PLATING OVER NICKEL IN SOLDER AREA.

6u" P/N 3101615600
 15u" P/N 3101615700
 30u" P/N 3101615800
 50u" P/N 3101615900

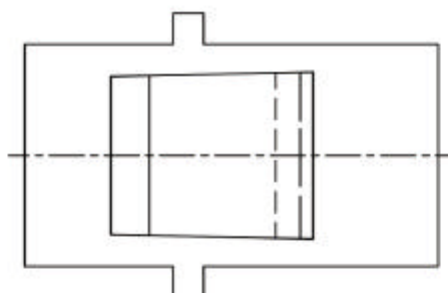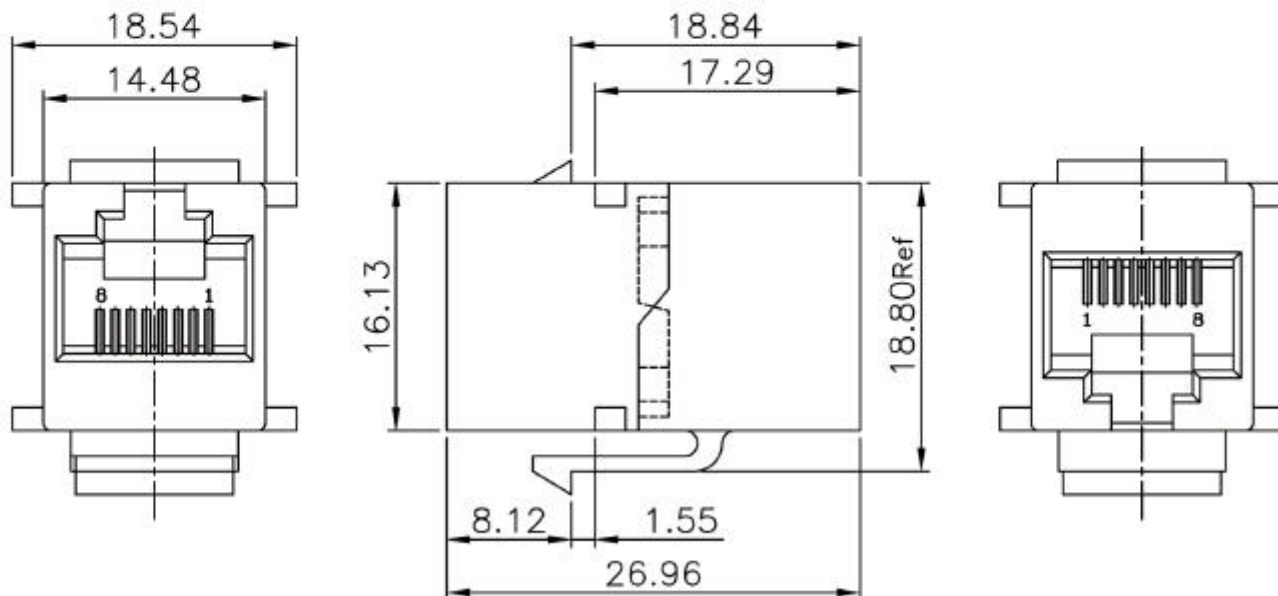

Front Panel Jack Only Clearance
 W/O Latch Feature

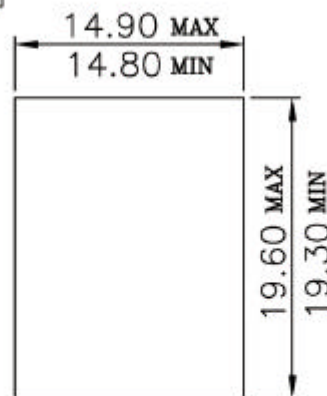

Single Panel-Latch Clearance
 Panel Thickness 0.062 inch

修正 REVISION	日期 DATE	容許公差 TOLERANCE	品名 MODULAR COUPLER JACK		
		.XXX ±0.10	ARTICLE UNSHIELDED (8P8C)		
		.XX ±0.25	圖號 080-88S-SI		
		.X ±0.38	DWG NO.		
		X ±0.50	DWG NO. 080-88S-SI		
核准 APPD.		單位 UNIT			
校對 CHKD.		mm		比例 SCALE	張數 SHEET
設計 DR. Hsu		88-01-04		2/1	1/1
Tri-Net Technology, Inc.		版本 REV. A			