
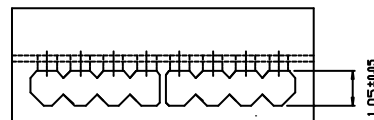



“2” : 2 PRONGS FOR SOLID WIRE(SS)

Material: Housing-polycarbonate, clear, terminal-0.36[.014] thick phosphor bronze plated with 1.27µm[.000050] minimum thick gold in localized area, gold flash over the remainder, over 2.54µm[.000100] minimum thick nickel underplate. Load bar - PBT polyester.

Plug will accept a 24 AWG Solid Conductor



UNIT: m/m

**TNT** **Tri-Net Technology, Inc.**  
Total Network Telesis U.S.A.

Modular Plug Assembly, 8 Position, Round Cable, Solid Wire

PART NUMBER 060-R88-S50-C5

DRAWING S. Niko

DATE 04/02/2009