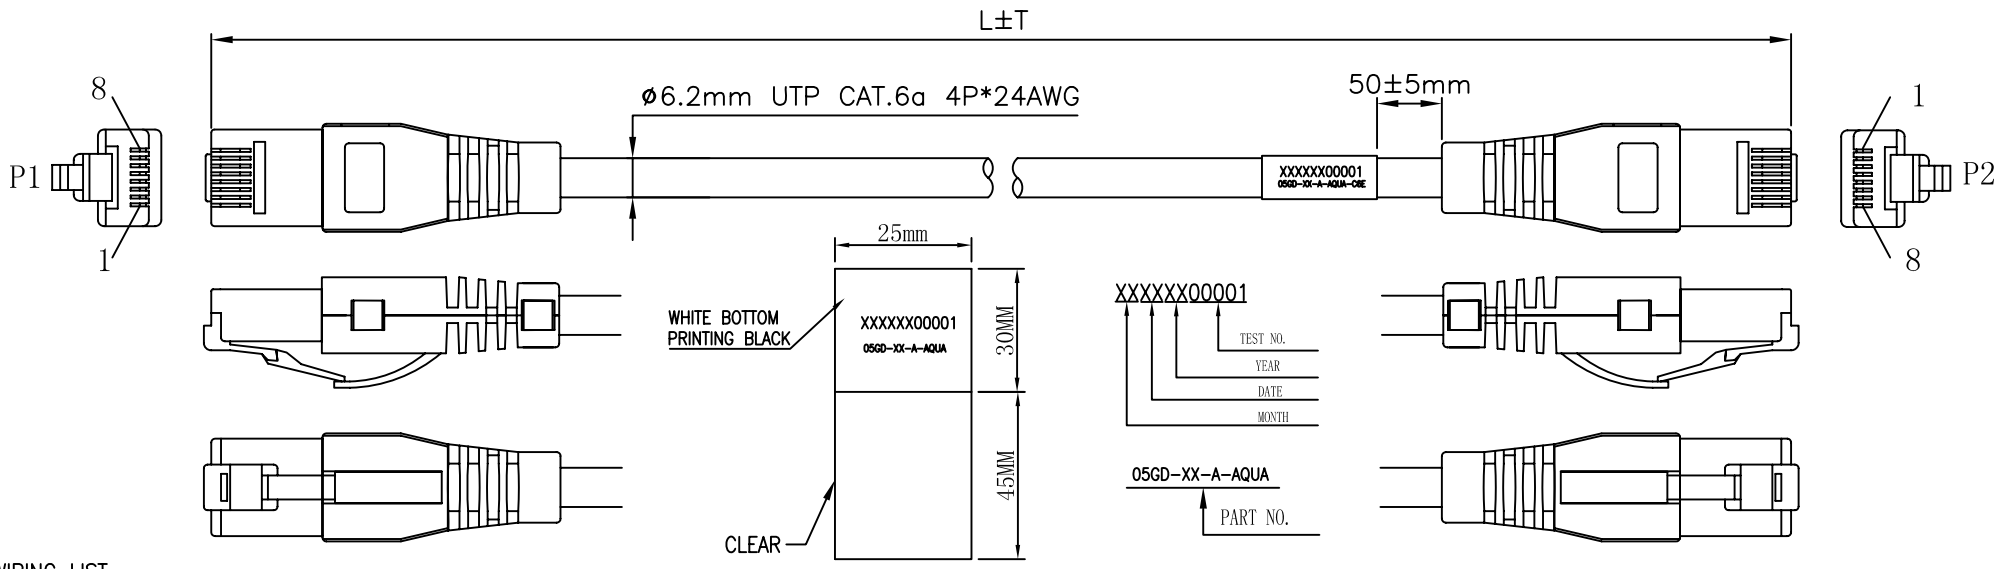

WIRING LIST

WIRE COLOR	P1	PAIRS	P2
WHITE/ORANGE	1	———	1
ORANGE	2	———	2
WHITE/GREEN	3	———	3
BLUE	4	———	4
WHITE/BLUE	5	———	5
GREEN	6	———	6
WHITE/BROWN	7	———	7
BROWN	8	———	8

L	T
L<=3FT	±25MM
3FT<L<15FT	±51MM
15FT<=L<=50FT	+152/−51MM
50FT<L<=225FT	+305/−152MM
225FT<L<=300FT	+500/−305MM
L>300FT	+914/−500MM

PLUG DRAWING

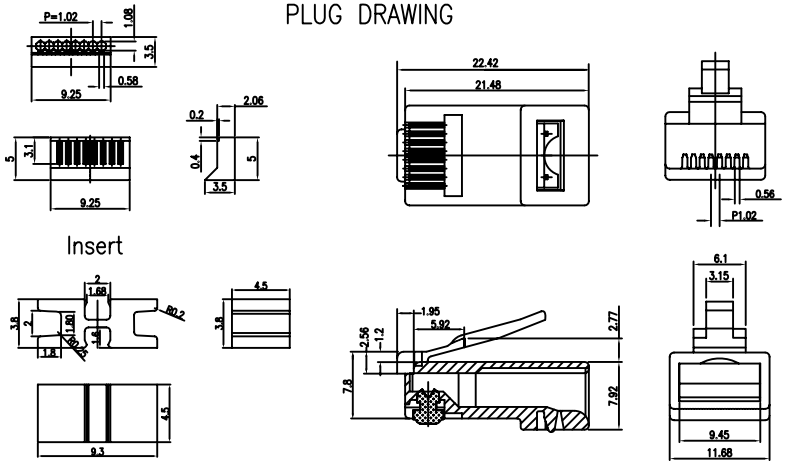

APPROVED BY

COMPANY: _____

PURCHASING/ENGINEER: _____

DATE: _____

05GD−XX−A−AQUA

LENGTH UNIT:FT

NOTE:

1. CABLE:CAT.6a UTP 24AWG*4P(7/0.203,STRAND BARE COPPER), INSULATION:HD−PE (OD:0.97±0.05MM)+CROSS OUTER JACKET: AQUA PVC, 500MHZ, 10G, OD:6.2±0.2MM. P/N:06A−R4P−T24−AQUA.
2. CONN.:P1 & P2: 8P8C PLUG,LONG BODY,SINGLE LAY,GOLD PLATED 50u". P/N:05GD(060−R88−T50−C6E)
3. ASS'Y BOOT:ø6.2mm. P/N:060−BOOT−SR3−AQUA
4. CABLE ASS'Y PASS FLUKE 4300 C6 PATCH CORD TEST.WITH TEST REPORT IN THE BAG.

RoHS COMPLIANT

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	03/24/07

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Tri−Net Technology,Inc.
http://www.trinetusa.com

SCALE	NONE
UNIT	MM
SHEET	1/1
DATE	03/24/07
REV	A
DWG NO.	
DRAWN BY	Walt
CHECK BY	
APPD BY	
TITLE	8P8C PLUG TO 8P8C PLUG
PART NO.	05GD−XX−A−AQUA