

SPECIFICATION:		4P*26AWG+MYLAR+DRAIN+AL.MYLAR		CONSTRUCTION D.W.G			
ITEM		SPECIFICATION					
CONDUCTOR	AWG	26AWG					
	MATERIAL	BARE COPPER					
	COND.SIZE	7/0.16±0.008 mm					
INSULATION	MIN.AVG.THICK	0.15 mm					
	MATERIAL	HD-PE					
	O . D	0.87±0.05 mm					
MYLAR	N O.	4P					
	COVERAGE	100%					
	OVERLAP	25% MIN					
DRAIN	AWG	26AWG					
	MATERIAL	TINNED COPPER					
	SIZE	7/0.16±0.008 mm×1PC					
Face Inside AL.MYLAR	COVERAGE	100%		COLOUR CODE: 1.BLUE *WHITE/BLUE 2.ORANGE*WHITE/ORANGE 3. GREEN*WHITE/GREEN 4. BROWN*WHITE/BROWN			
	OVERLAP	25% MIN					
JACKET	MIN.AVG.THICK	0.50 mm					
	MATERIAL	LIGHT PVC					
	COLOUR						
	O . D	6.00 ± 0.15 mm					
ELECTRICAL CHARACTERISTICS						MARKING	
1. Rating : TEMP 60°C 2. Conductor Resistance: AT 20°C MAX 26AWG: 148.94Ω/km;						E188601 (UL) TYPE CM 26AWG/4PRS LL84201 CSA TYPE CMG FT4 FTP CAT6 CABLE COPARTNER RoHS	
						REMARK	
		PART NO.		06G-R4P-T26-SH-XX			
APPROVED				CUSTOMER			
CHECKED				REV A			
DRAWING		LYJ		DATE 2006/10/25			



Copartner Wire & Cable (SHENZHEN)MFG CO.,LTD

CABLE TEST REPORT SUMMARY

TEL : 0755-27312988 FAX : 0755-27312436

Spec : CAT6-Strand Customer :
 Length : 100. M Lot # : STP Bundle # :
 Temp : 22. degC Date/Time : 2006/9/27下午 07:38:28
 Comment : 4P*26AWG
 Equipments : HP8753x/HP54750A+HP54754A

Parameter : Return Loss Unit : [dB]

Start	1.0	10.0	20.0															
Stop	10.0	20.0	250.0															
Pair 1	25.17	35.15	17.9															Pass
Pair 2	24.74	29.17	19.26															Pass
Pair 3	25.05	36.56	24.29															Pass
Pair 4	25.08	34.35	22.59															Pass
Lmt Lo	F15	23	F16															

Parameter : Near-End Xtalk Unit : [dB]

Start	.772	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100.0	155.5	200.0	250.0	.772		
Stop	.772	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100.0	155.5	200.0	250.0	250.0		
Lmt Hi	-76.	-74.31	-65.28	-60.77	-59.31	-56.25	-54.8	-53.35	-51.89	-47.38	-44.31	-41.44	-39.8	-38.35	F19		
P 2-1	-86.7	-92.7	-85.1	-74.7	-75.5	-66.2	-76.2	-64.0	-61.4	-67.0	-52.5	-58.7	-60.5	-61.5	-50.0		Pass
P 3-1	-91.2	-93.5	-74.8	-69.2	-85.9	-61.5	-69.2	-64.2	-60.0	-57.7	-60.6	-59.0	-54.5	-49.9	-58.2		Pass
P 4-1	-90.3	-89.6	-78.4	-72.3	-74.3	-66.4	-65.4	-74.3	-67.8	-59.5	-60.2	-59.0	-60.8	-61.4	-63.1		Pass
P 1-2	-88.4	-92.2	-85.0	-75.2	-75.2	-66.1	-76.5	-64.0	-61.4	-67.2	-52.6	-58.6	-60.7	-61.5	-50.1		Pass
P 3-2	-82.7	-87.6	-70.4	-67.9	-67.7	-63.6	-65.9	-60.7	-61.0	-61.1	-52.6	-48.6	-64.9	-66.5	-54.6		Pass
P 4-2	-87.3	-88.3	-78.6	-81.9	-66.9	-77.3	-62.1	-62.6	-65.9	-72.4	-58.8	-51.8	-49.7	-48.7	-43.6		Pass
P 1-3	-92.5	-96.7	-74.6	-69.2	-85.8	-61.6	-69.1	-64.1	-60.0	-57.7	-60.7	-59.0	-54.6	-50.0	-58.1		Pass
P 2-3	-83.8	-88.3	-70.3	-67.6	-67.8	-63.6	-65.9	-60.6	-60.9	-61.1	-52.6	-48.7	-64.7	-66.3	-54.7		Pass
P 4-3	-85.4	-87.2	-75.9	-72.1	-69.9	-72.8	-70.2	-67.7	-66.7	-59.3	-62.3	-58.9	-46.8	-47.5	-44.2		Pass
P 1-4	-88.5	-89.1	-78.5	-72.5	-74.2	-66.4	-65.3	-73.9	-68.1	-59.5	-60.1	-59.1	-60.8	-61.4	-63.1		Pass
P 2-4	-88.2	-88.0	-78.3	-82.4	-67.0	-77.5	-62.0	-62.7	-65.7	-72.4	-58.8	-51.8	-49.8	-48.8	-43.6		Pass
P 3-4	-86.4	-86.8	-75.9	-72.1	-70.2	-73.0	-70.0	-67.5	-66.6	-59.3	-62.3	-58.9	-46.8	-47.5	-44.2		Pass



Tested By :











Copartner Wire & Cable (SHENZHEN)MFG CO.,LTD

CABLE TEST REPORT SUMMARY

TEL : 0755-27312988 FAX : 0755-27312436

Spec : CAT6-Strand Customer :
Length : 100. M Lot # : STP Bundle # :
Temp : 22. degC Date/Time : 2006/9/27下午 07:38:28
Comment : 4P*26AWG

Equipment : HP8753x/HP54750A+HP54754A

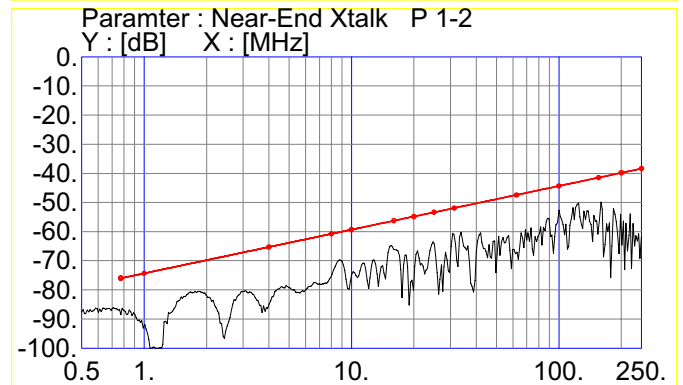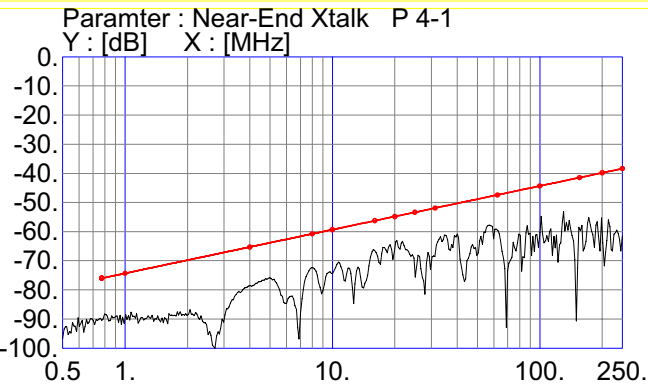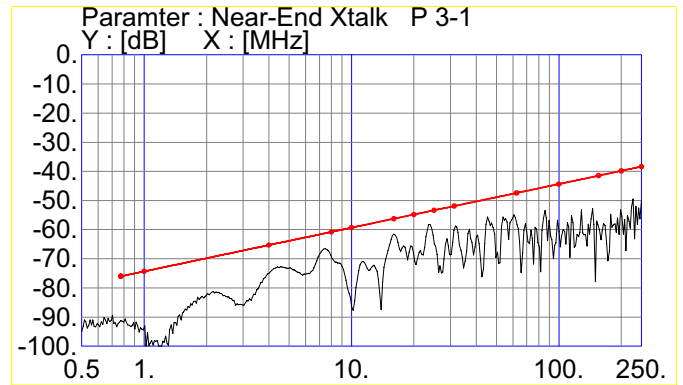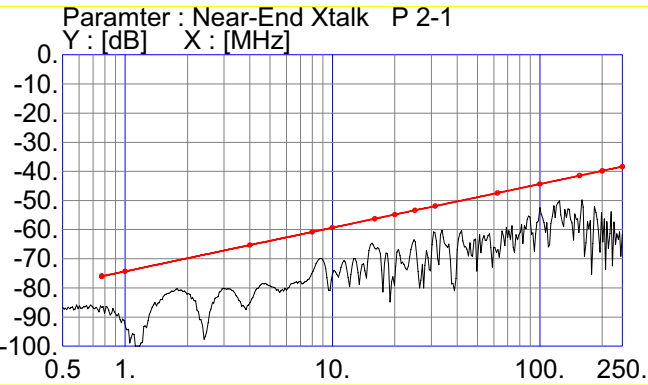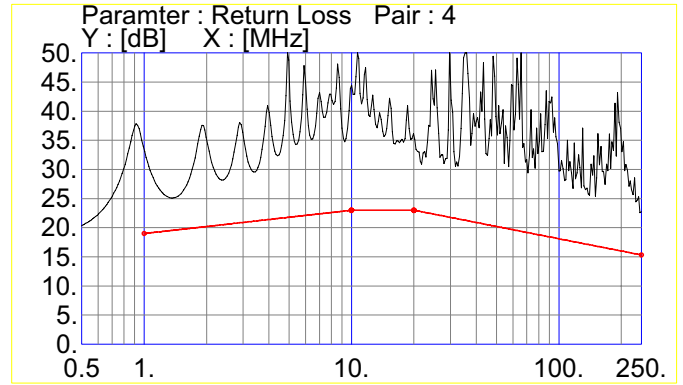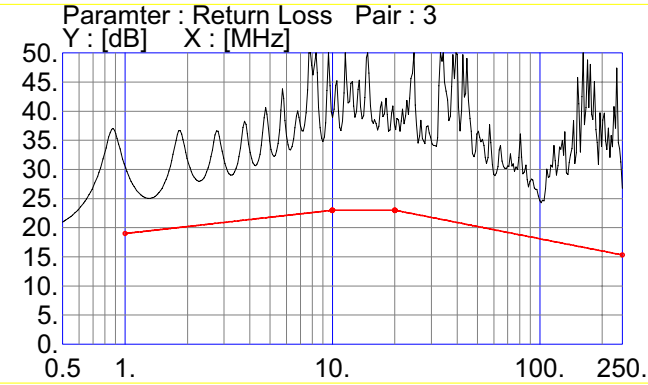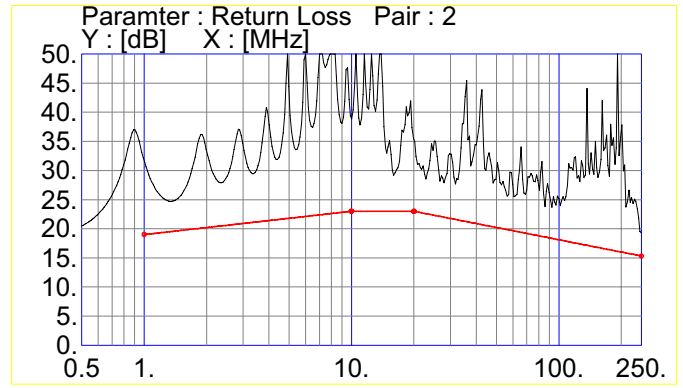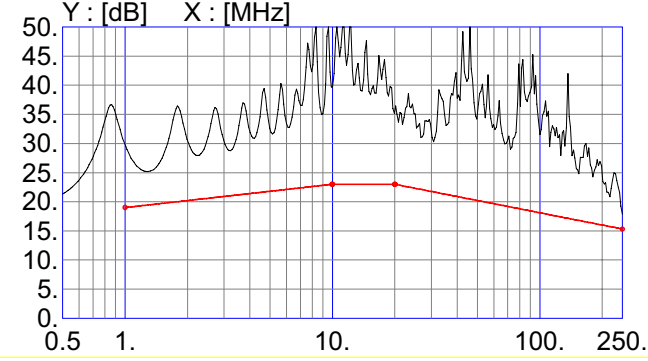

Tested By :













Copartner Wire & Cable (SHENZHEN)MFG CO.,LTD

CABLE TEST REPORT SUMMARY

TEL : 0755-27312988 FAX : 0755-27312436

Spec : CAT6-Strand Customer :
Length : 100. M Lot # : STP Bundle # :
Temp : 22. degC Date/Time : 2006/9/27下午 07:38:28
Comment : 4P*26AWG

Equipment : HP8753/HP54750A+HP54754A

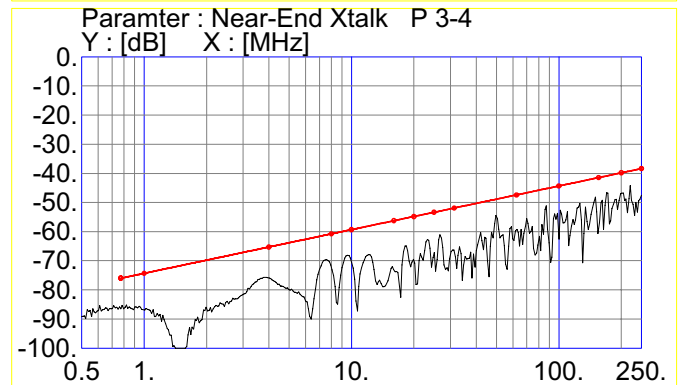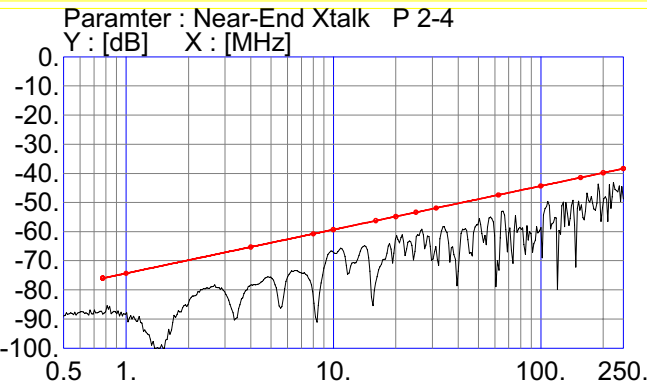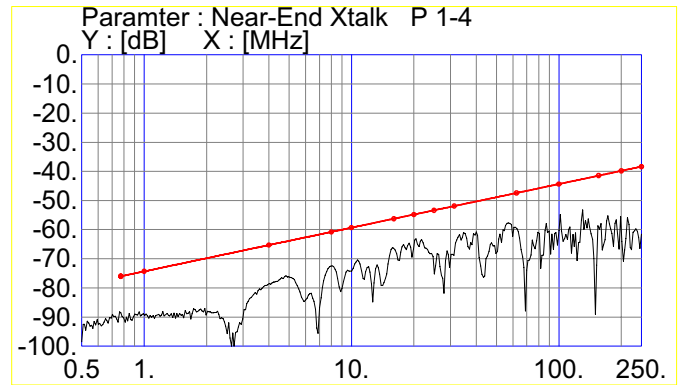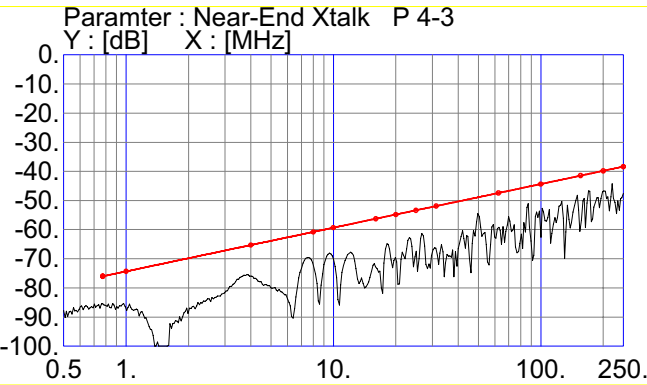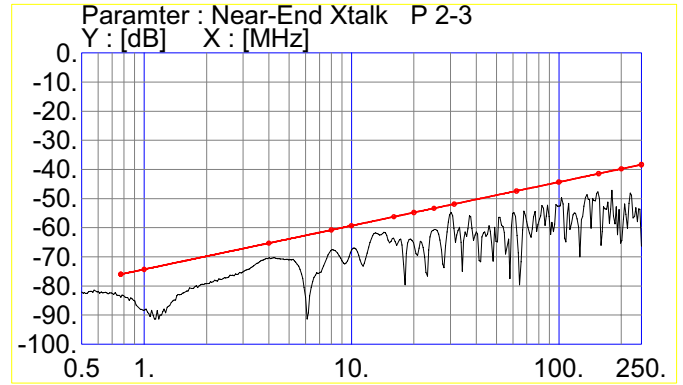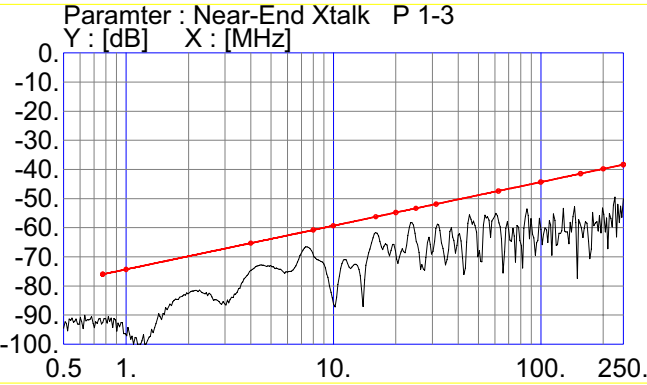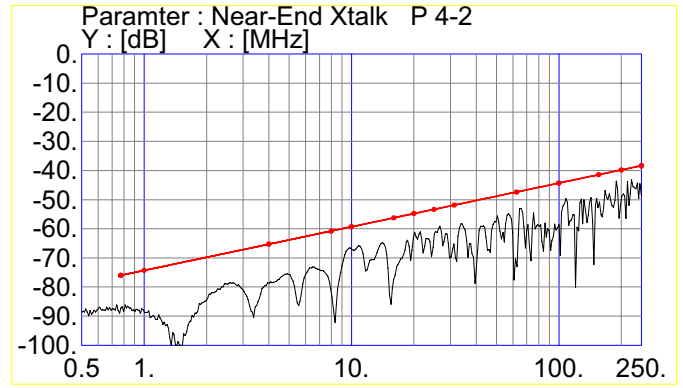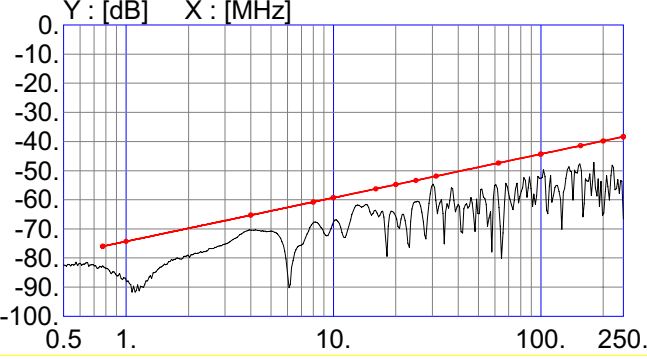

Tested By :

