


APPROVED BY \_\_\_\_\_  
 COMPANY: \_\_\_\_\_  
 PURCHASING/ENGINEER: \_\_\_\_\_  
 DATE: \_\_\_\_\_

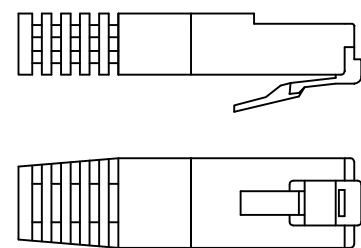

P/N	L(FT)	L(MM)	T
CAT6-UTP-DOWN-1	1FT	305MM	+15/-15MM
CAT6-UTP-DOWN-3	3FT	915MM	+25/-25MM
CAT6-UTP-DOWN-5	5FT	1524MM	+25/-25MM
CAT6-UTP-DOWN-7	7FT	2134MM	+50/-50MM
CAT6-UTP-DOWN-10	10FT	3048MM	+50/-50MM
CAT6-UTP-DOWN-15	15FT	4572MM	+100/-50MM
CAT6-UTP-DOWN-25	25FT	7620MM	+150/-50MM

WIRE CONNECTION

WIRE COLOR	P1	PAIRS	P2
WHITE/ORANGE	1	=====	1
ORANGE	2	=====	2
WHITE/GREEN	3	=====	3
BLUE	4	=====	4
WHITE/BLUE	5	=====	5
GREEN	6	=====	6
WHITE/BROWN	7	=====	7
BROWN	8	=====	8

- NOTES:
- CABLE:UTP CAT.6 CABLE.4P\*24AWG(7/0.203)(STRANDED BARE COPPER. INSULATION:HD-PE.OD:0.95±0.05MM)+OUTER JACKET: BLUE PVC.OD:6.2±0.15MM.P/N:(06G-R4P-T24-BL-TPL)
  - CONN.: P1,P2: 8P8C PLUG, LONG BODY, DUBLE LAY. GOLD PLATED 3U", TWO PARTS.P/N:060-R88-T3-24AWG
  - ALL HOOD MOLDED BLUE 60P PVC.
  - CABLE ASS'Y MUST PASS CONTINUITY TEST.
  - MOLD NO: TNT-88-18, TNT-88-38.



A	INITIAL RELEASE		07/15/11			
REV	DESCRIPTION OF CHANGE		DATE			
TOLERANCE INCHES		M/M	<b>Tri-Net Technology, Inc.</b> Total Network Telesis U.S.A.			
.X	.015	.30				
.XX	.010	.10				
.XXX		.005	.05	SCALE	NONE	REV A
				UNIT	MM	
DRAWN BY		Tiger		SHEET	1/1	DWG NO.
				DATE	06/29/11	
CHECK BY				TITLE		
				8P8C PLUG(90',UP) TO 8P8C PLUG(180')		
APPD BY				PART NO.		
				05GE-LENGTH-US-A-COLOR		