

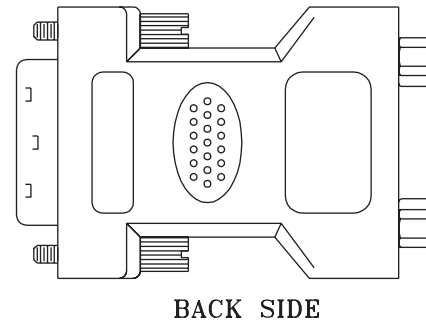

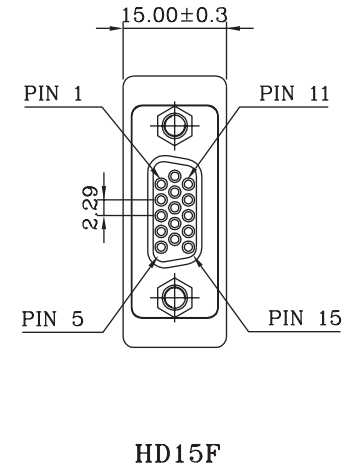
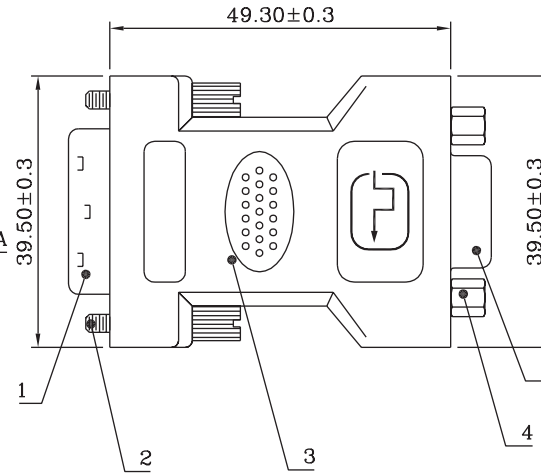


WIRE DIAGRAM

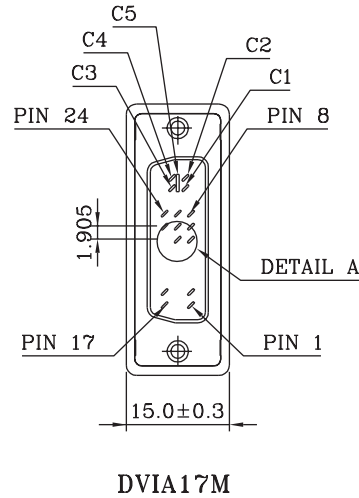

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 5MΩ

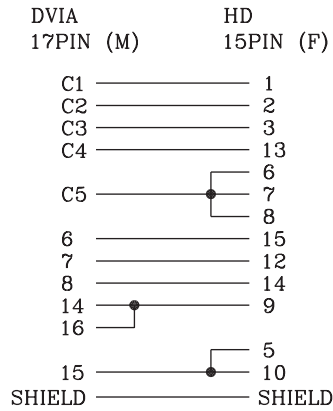

COMPONENTS	DESCRIPTION	Q'TY
1	DVIA17M DVI-Analog 17P Male Connector Insulator: High Temperature Plastic UL-94V-0 Contact: Brass Shell: Steel With Tin Plated 150μ" Over Contact Plating: Gold On Contact Area And Tin/LEAD On Solder Cup All With Nickel Underplating	1
2	Jack Screw UNC #4-40 Nickel Plated	2
3	Hood P.V.C Molded Color: Beige Inner Molded With Copper Foil Shielded	1
4	Screw Lock UNC #4-40 Nickel Plated	2
5	HD15F D-SUB High Density 2.29mm 15P Female Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plated	1

DWG NO: DVI-012	TNT Tri-Net Technology		
DR:	TITLE:	DVI-A(M) to VGA(F) Adapter	
CHKD:	SUPPLIER NO.:	70024-1715-0004-1111	
SALES:	SUPPLIER NAME:	WING-TECH	
APPD:	TNT P/N:	E09-AM-HD15F	
		UNIT mm	SCALE NONE
		REV. A	