

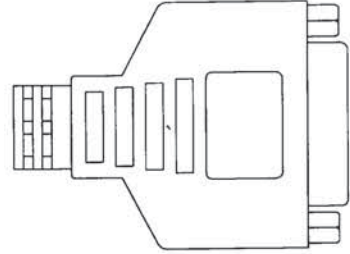


P/N	L	T
E08-ADM-ADF-D-06	1829mm	±51mm
E08-ADM-ADF-D-10	3048mm	±51mm

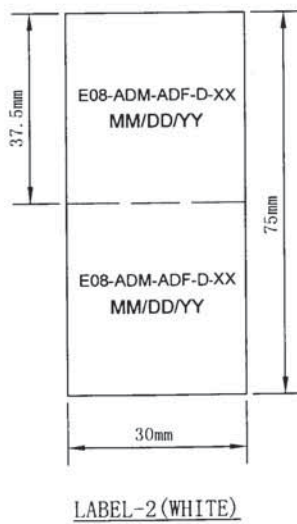

WIRE LIST:

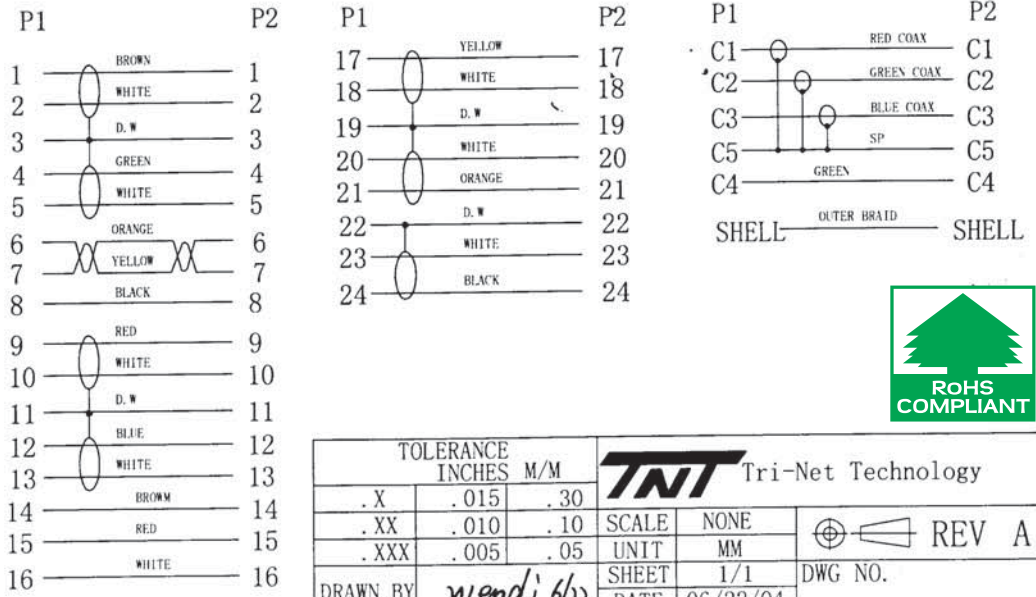

- NOTE:
- CABLE:UL20276 (30AWG+SP+AL/MY)*3COAX + (28AWG*1P+D+AL/MY)*7PCS+28AWG*1P+ 28AWG*5C+AEB+PVC JACKET:BLACK (TNT-BK) OD=9.0±0.15MM
 - CONN:P1 DVI 24+5 MALE, PIN:G/F, INSULATION BLACK.
P2 DVI 24+5 FEMALE, PIN:G/F, INSULATION WHITE ASS' Y TYPE.
 - SCREW:#4-40UNC MOLDED BLACK (TNT-BK).
 - P1 HOOD MOLDED 45P PVC BLACK (TNT-BK).
 - 100% ELECTRICAL TESTING:
CONTACT RESISTANCE:2 OHM
INSULATION RESISTANCE:50M OHM
DC 500V



TOLERANCE			INCHES		M/M		TNT Tri-Net Technology	
. X	. 015	. 30	SCALE	NONE	REV A	DWG NO.	TITLE	DVI 24+5 MALE TO DVI 24+5 FEMALE
. XX	. 010	. 10	UNIT	MM				
. XXX	. 005	. 05	SHEET	1/1				
DRAWN BY	wendi 6/22	DATE	06/22/04	PART NO. E08-ADM-ADF-D-XX				
CHECK BY	pearl 6/22							
APPD BY	pete 7/22/04							