


WIRE CONNECTION

NOTE:

- 1.CABLE:UL20276 (28AWG*1P+D-Free-edge-AL)*4C+28AWG*1P+28AWG*5C+AB JACKET COLOR:BLACK(TNT-BK) OD:7.3±0.15mm.
- 2.CONNECTOR:P1:HDMI 19P MALE,SOLDER TYPE,GOLD 30U" PLATED CONTACTS,INSULATION:BLACK,NICKEL PLATED SHELL.
P2:DVI 18+1 MALE,PIN:G/F,INSULATION BLACK.
- 3.SCREW:#4-40UNC MOLDED BLACK(TNT-BK).
- 4.ALL HOOD:MOLDED BLACK 45P PVC(TNT-BK).
- 5.100% OPEN AND SHORT TESTING:
INSULATION RESISTANCE:10M OHM
CONDUCTOR RESISTANCE:3 OHM
VOLTAGE:DC 300V
- 6.MOLD NO:OUTER MOLDING:TNT-HDMI-01,TNT-DVI-01.

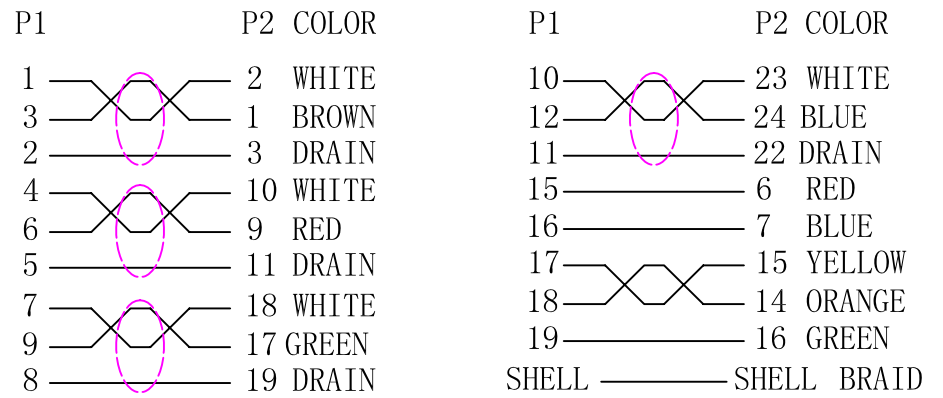

P/N	L	T
E10-HDMI-DVI-06	6 FEET	±2 INCHES
E10-HDMI-DVI-10	10 FEET	±2 INCHES
E10-HDMI-DVI-15	15 FEET	±6 INCHES



TOLERANCE			Tri-Net Technology, Inc.			
INCHES	M/M		http://www.trinetusa.com			
.X	.015	.30	SCALE	NONE	REV A	
.XX	.010	.10	UNIT	MM		
.XXX	.005	.05	SHEET	1/2		
DRAWN BY			DATE	12/20/04	DWG NO.	
CHECK BY			TITLE HDMI19P TO DVI18+1 CABLE			
APPD BY			PART NO. E10-HDMI-DVI-XX			