



View A

LABEL-1

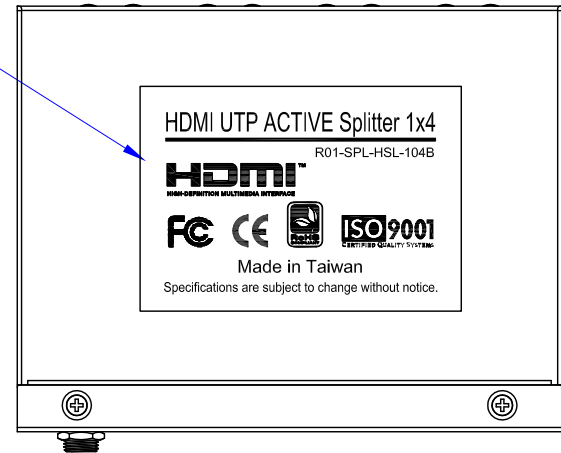


VIEW A

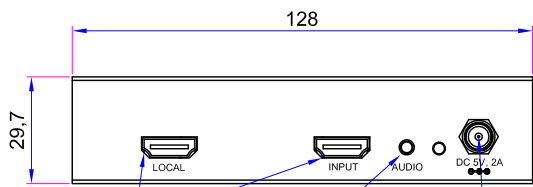


HDMI CONNECTOR LOCAL INPUT AUDIO DC 5V, 2A DC POWER JACK

AUDIO SWITCH

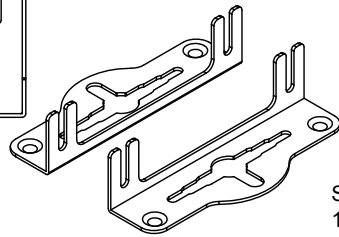

Surface Mount Bracket



Power adapter
Input: 100-240V
Output: 5V, 2A

Specifications:

1. Splits and transmits HDMI signals to four (4) separate HDMI displays
2. For active receiver: Extends the transmission distance up to 150 feet @ Blu-ray 1080/60p using one 24 AWG Solid Wire UTP Cat5/6 cable
3. For passive receiver: Extends the transmission distance up to 50 feet @ Blu-ray 1080/60p using one 24 AWG Solid Wire UTP Cat5/6 cable
4. Supports resolutions up to Blu-ray 1080/60p, Audio DTS-HD, Dolby True-HD signals
5. AC/DC Power adapter included
6. Detachable surface mount brackets included
7. Dimensions: 128(L) x 100(W) x 29.7(H) mm
8. HDMI 1.3b, HDMI 1.4 3D-Ready, and HDCP compliant
9. Capable to use HDMI cable to directly cascade to next splitter without loss on HDMI signal
10. Enclosure: Metal, Color: Black
11. (1) HDMI 1 ft. cable included

Note:
Green LED indicates power on, Orange LED indicates signal on when connected.

A	10/06/14	INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)			
DECIMALS	INCHES	MM	UNITS
.x	0.015	0.30	SHEET
.xxx	0.010	0.10	DATA
.xxxx	0.005	0.05	VER.
ANGLE : ± 0.5°		APPR.	CHK.
		DR.	Afra