





View A

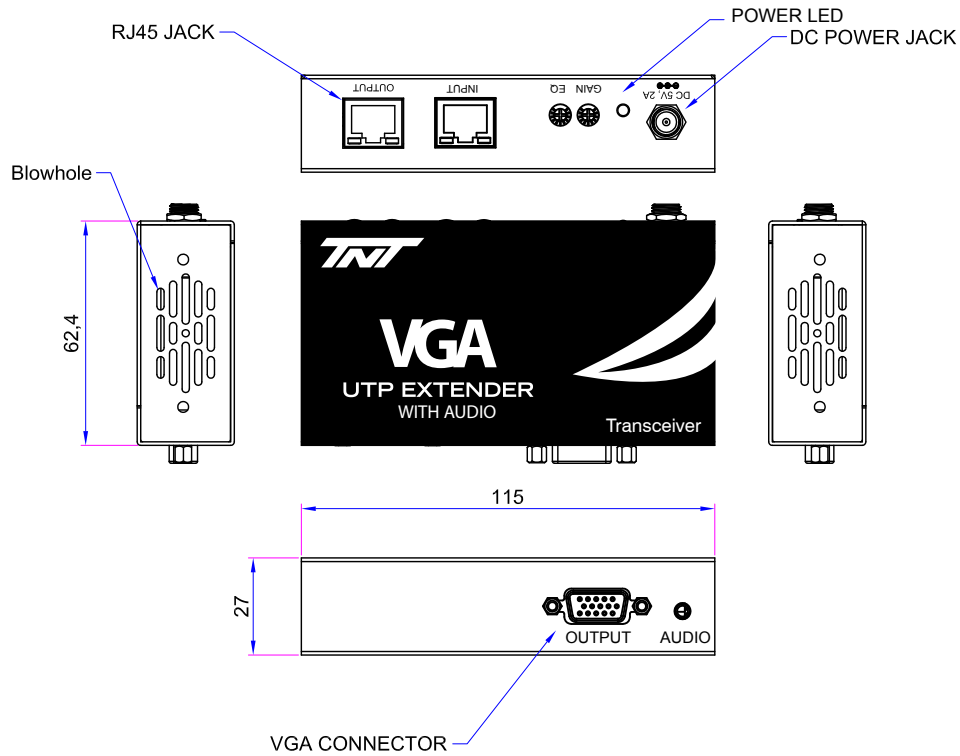

Surface Mount Bracket



Power adapter  
Input: 100-240V  
Output: 5V, 2A

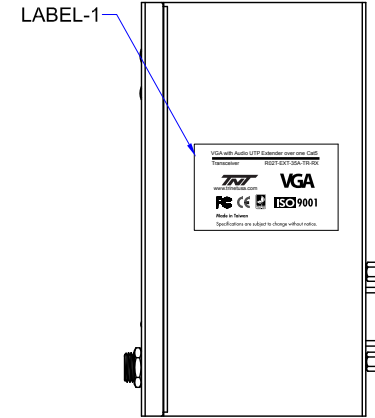

View A

Specification:

1. Work as transceiver for
  - VGA + Audio UTP Transmitter P/N R02T-EXT-C5E-35A-TX
  - VGA + Audio 1x2 UTP Splitter P/N R02T-SPL-C5E-35A-102B
  - VGA + Audio 1x4 UTP Splitter P/N R02T-SPL-C5E-35A-104B
2. Extend distance up to 2000 feet from source to last transceiver receiver
3. Support resolution up to 1920 x1440 at any refresh rate
4. Daisy chain each transceiver with one Cat5/6 cable up to 4 transceivers
5. Box style: compact, rigged metal enclosure with clear silk screen indicators
6. Secure AC/DC power adapter with unit by screw type connection
7. Screw driver included to adjust EQ switch at transceiver to tune up best image quality
8. Dimensions: 115(L) x 62.4(W) x 27(H) mm

A	10/06/14	INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.	
DECIMALS	INCHES	MM	UNITS
.X	0.015	0.30	mm
.XX	0.010	0.10	SHEET 4-1
.XXX	0.005	0.05	DATA 10/06/14
ANGLE : ± 0.5°		VER. A	PART NO R02T-EXT-35A-TR-RX
APPD.		CHK.	DR. Afra