

View A







RJ45 JACK




DC POWER JACK


Blowhole

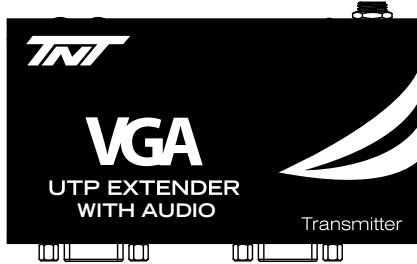

Surface Mount Bracket

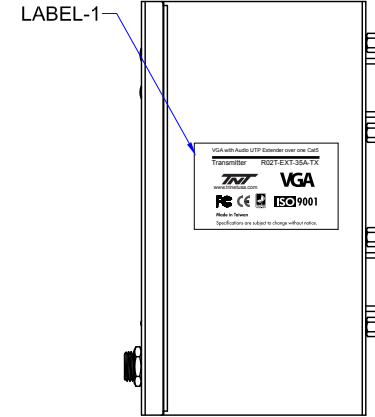


View A

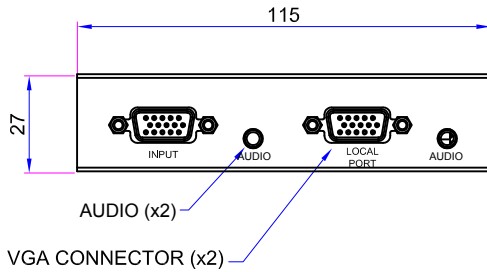

AUDIO (x2)

VGA CONNECTOR (x2)








Power adapter
Input: 100-240V
Output: 5V, 2A

Specification:



1. Extend distance up to 2000 feet from source to last transceiver receiver
2. Support resolution up to 1920 x 1440 at any refresh rate
3. Daisy chain each transceiver with one Cat5/6 cable up to at least 4 transceivers
4. Box style: compact, rigged metal enclosure with clear silk screen indicators
5. Secure AC/DC power adapter with unit by screw type connection
6. Screw driver included to adjust EQ switch at transceiver to tune up best image quality
7. Dimensions: 115(L) x 62.4(W) x 27(H) mm

A	10/06/14	INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.	
DECIMALS	INCHES	MM	UNITS
.X	0.015	0.30	SHEET 5-2
.XXX	0.010	0.10	DATA 10/06/14
.XXXX	0.005	0.05	VER. A
ANGLE : ± 0.5°		APPR.	CHK. DR. Afra
		PART NO	R02T-EXT-35A-TR
		DWG NO	R02T-EXT-C5E-35A-TX

View A

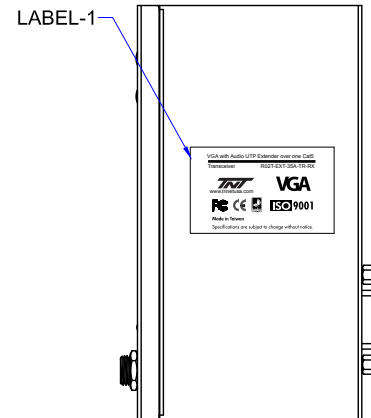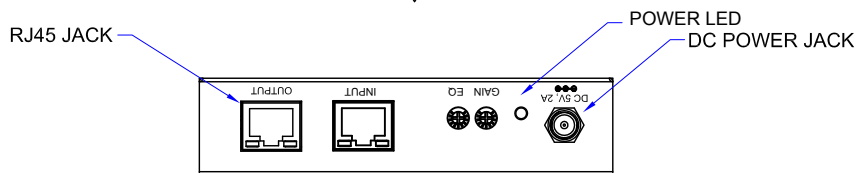

View A

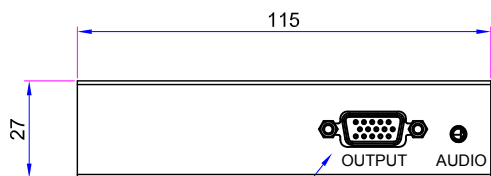

Power adapter
Input: 100-240V
Output: 5V,2A

A	10/06/14	INITIAL RELEASE			
REV	DATE	DESCRIPTION OF CHANGE			
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.			
DECIMALS	INCHES	MM	UNITS	mm	Title
.x	0.015	0.30	SHEET	5-1	VGA with Audio UTP Extender Daisy Chainable UTP Transceiver Set
.xx	0.010	0.10	DATA	10/06/14	PART NO R02T-EXT-35A-TR
.xxx	0.005	0.05	VER.	A	DWG NO R02T-EXT-35A-TR-RX
ANGLE : ± 0.5°		APPD.	CHK.	DR.	Afra