



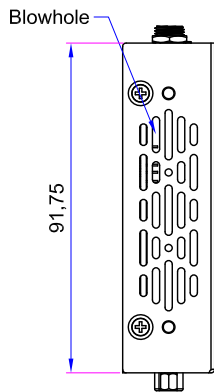




View A

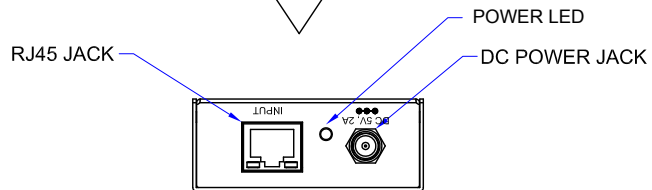

Surface Mount Bracket



Power adapter  
Input: 100-240V  
Output: 5V,2A

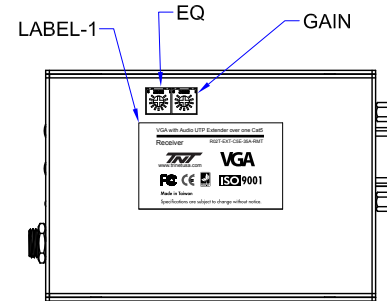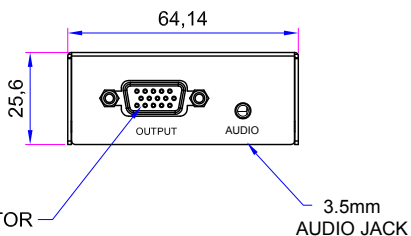

View A

Specification:

1. Work with monitors, projectors, and HDTV and flat panels.
2. Support resolution up to 1920 x 1440 at any refresh rate
3. Box style: compact, rigged metal enclosure with clear silk screen indicators
4. Secure AC/DC power adapter with unit by screw type connection
5. Screw driver included for receiver's EQ adjustment to tune up best image quality up to 1000 feet away
6. Built-in 3.5 mm audio connecting port for speakers
7. Dimensions: 91.75(L) x 64.14(W) x 25.6(H) mm.
8. Work as a receiver for:
  - VGA + Audio UTP Extended 1x2 Splitter (P/N R02T-SPL-C5E-35A-102B)
  - VGA + Audio UTP Extended 1x4 Splitter (P/N R02T-SPL-C5E-35A-104B)

Description:

Receive VGA video + Audio signal to 1000 feet on a single CAT5/5e/6 cable

Note1 the green LED indicates power on, orange LED indicates signal on  
 Note2 solid wire Cat5e/6 cable is requires to achieve max extension distance and resolution

A	10/06/14	INITIAL RELEASE			
REV	DATE	DESCRIPTION OF CHANGE			
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.			
DECIMALS	INCHES	MM	UNITS	mm	Title
.X	0.015	0.30	SHEET	4-1	VGA with Audio UTP Extender Receiver
.XX	0.010	0.10	DATA	10/06/14	PART NO R02T-EXT-C5E-35A-RMT
.XXX	0.005	0.05	VER.	A	DWG NO R02T-EXT-C5E-35A-RMT
ANGLE : ±	0.5°	APPD.	CHK.	DR.	Afra