

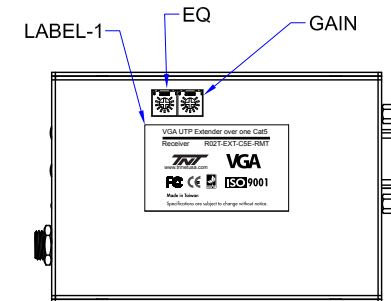



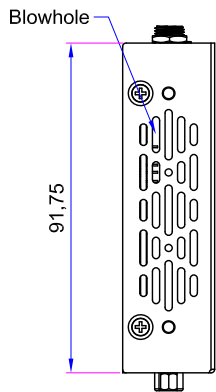


View A

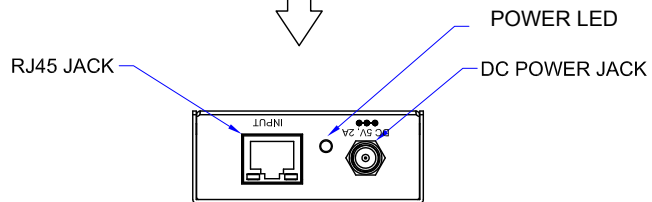

View A



Specification:

1. Work with monitors, projectors, and HDTV and flat panels.
2. Support resolution up to 1920 x1440 at any refresh rate
3. Box style: compact, rigged metal enclosure with clear silk screen indicators
4. Secure AC/DC power adapter with unit by screw type connection
5. Screw driver include for receiver EQ adjustment to tune up best image quality up to 1000 feet
6. Dimensions:91.75(L) x 64.14(W) x 25.6(H) mm
7. Work as receiver for:

- VGA UTP Extended 1x2 Splitter (P/N R02T-SPL-C5E-102B)
- VGA UTP Extended 1x4 Splitter (P/N R02T-SPL-C5E-104B)

Description:

Receive VGA video signal to 1000 feet on a single CAT5/5e/6 cable

Note1 the green LED indicates power on and orange LED indicates signal on

Note2 solid wire Cat5e/6 cable is requires to achieve max extension distance and resolution

A	10/06/14	INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.	
DECIMALS	INCHES	MM	UNITS
.x	0.015	0.30	SHEET
.xxx	0.010	0.10	DATA
.xxxx	0.005	0.05	VER.
ANGLE : ± 0.5°		APPD.	CHK.
		DR.	Afra