








View A



45° RJ45 JACK




Power adapter
Input: 100-240V
Output: 5V,2A

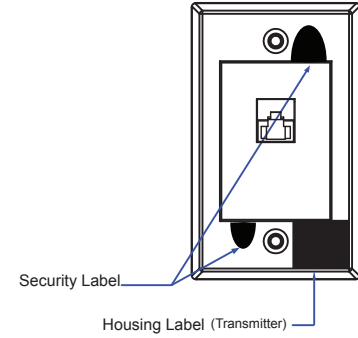


Security Label

Housing Label (Transmitter)





View A





VGA Y Splitter Cable (1pc)

REV	DATE	INITIAL RELEASE			
REV	DATE	DESCRIPTION OF CHANGE			
GENERAL TOLERANCE (Unless Specified)		 Tri-Net Electronics Co. Ltd.			
DECIMALS	INCHES	MM	UNITS	mm	Title
.x	0.015	0.30	SHEET	6-1	VGA UTP Extender
.xx	0.010	0.10	DATA	10/06/11	45° RJ45 Jack Wallplate
.xxx	0.005	0.05	VER.	A	PART NO R02T-EXT-JP
ANGLE : ± 0.5°		APPD.	CHK.		DR. Afra


View A

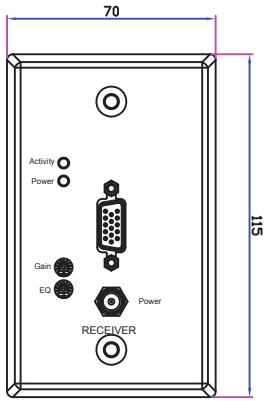

45° RJ45 JACK

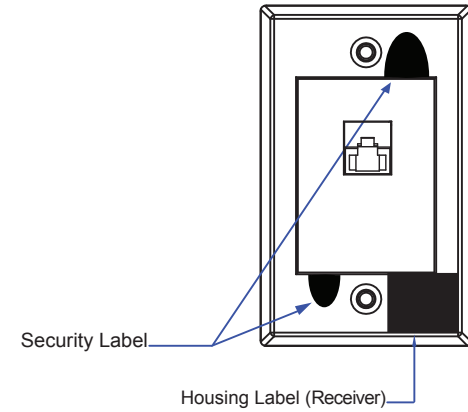



View A



Power adapter
Input: 100-240V
Output: 5V,2A

Specifications:

1. Extends and receives VGA video signal up to 1000 feet in one Cat5/6 cable
2. Works with monitors, projectors, HDTV and flat panels.
3. No software needed
4. Adjusts EQ and Gain switch at receiver to obtain best image quality
5. Secured AC/DC power adapter included
6. Supports resolutions up to 1920x1440 at any refresh rate
7. Y cable to connect local monitor while setting up connection included

REV	DATE	DESCRIPTION OF CHANGE				
A	10/06/11	INITIAL RELEASE				
GENERAL TOLERANCE (Unless Specified)		 Tri-Net Electronics Co. Ltd.				
DECIMALS	INCHES	MM	UNITS	mm	Title	
.x	0.015	0.30	SHEET	6-2	VGA UTP Extender	
.xx	0.010	0.10	DATA	10/06/11	PART NO	R02T-EXT-JP
.xxx	0.005	0.05		VER.	A	DWG NO R02T-EXT-RX-JP
ANGLE : ± 0.5°			APPD.	CHK.	DR.	Afra