

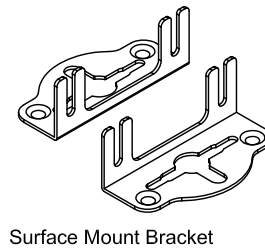



View A

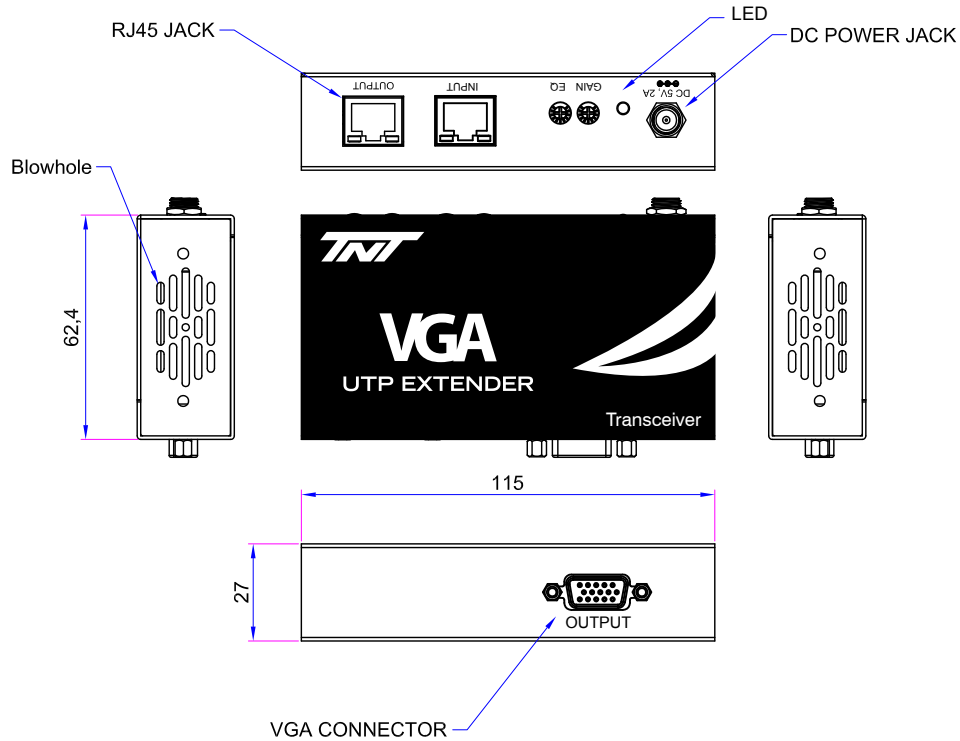

Surface Mount Bracket



Power adapter
Input: 100-240V
Output: 5V, 2A

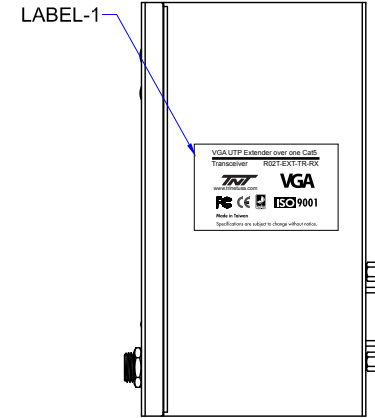

View A

Specification:

1. Work as transceiver for
 - VGA UTP Transmitter P/N R02T-EXT-C5E-TX
 - VGA 1x2 UTP Splitter P/N R02T-SPL-C5E-102B
 - VGA 1x4 UTP Splitter P/N R02T-SPL-C5E-104B
2. Extend distance up to 2000 feet from source to last transceiver receiver
3. Support resolution up to 1920 x1440 at any refresh rate
4. Daisy chain each transceiver with one Cat5/6 cable up to 4 transceivers
5. Box style: compact, rigged metal enclosure with clear silk screen indicators
6. Secure AC/DC power adapter with unit by screw type connection
7. Screw driver included to adjust EQ switch at transceiver to tune up best image quality
8. Dimensions: 115(L) x 62.4(W) x 27(H) mm

A	10/06/14	INITIAL RELEASE			
REV	DATE	DESCRIPTION OF CHANGE			
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.			
DECIMALS	INCHES	MM	UNITS	Title	
.X	0.015	0.30	SHEET	4-1	VGA UTP Extender
.XX	0.010	0.10	DATA	10/06/14	Daisy Chainable UTP Transceiver
.XXX	0.005	0.05	VER.	A	PART NO R02T-EXT-TR-RX
ANGLE : ± 0.5°		APPD.	CHK.	DR.	Afra