

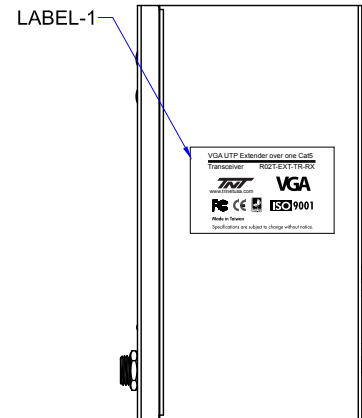



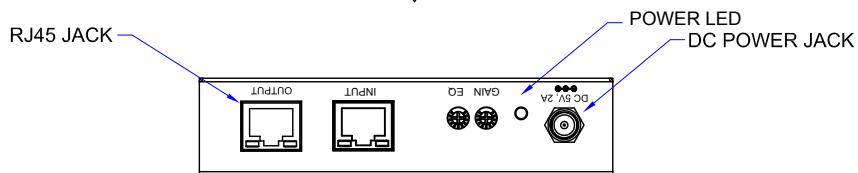


View A






View A

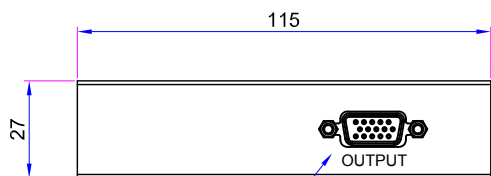



Power adapter
Input: 100-240V
Output: 5V,2A

A	10/06/14	INITIAL RELEASE			
REV	DATE	DESCRIPTION OF CHANGE			
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.			
DECIMALS	INCHES	MM	UNITS	mm	Title
.x	0.015	0.30	SHEET	5-1	VGA UTP Extender
.xx	0.010	0.10	DATA	10/06/14	Daisy Chainable UTP Transceiver Set
.xxx	0.005	0.05	VER.	A	PART NO R02T-EXT-TR
ANGLE : ± 0.5°		APPD.	CHK.	DR.	Afra


View A

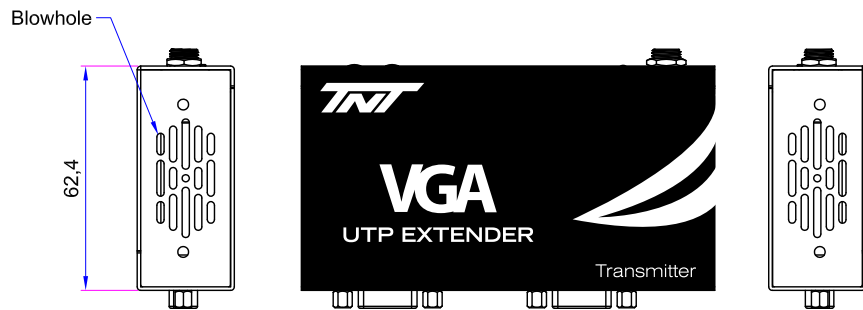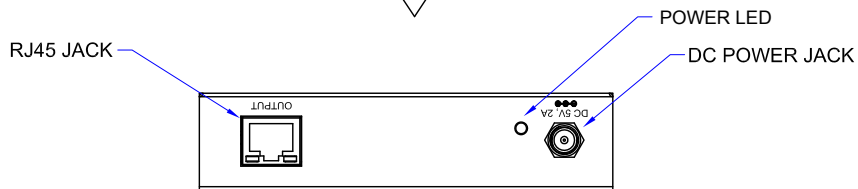

Surface Mount Bracket

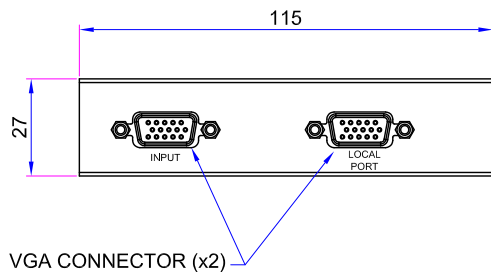

Power adapter
Input: 100-240V
Output: 5V,2A

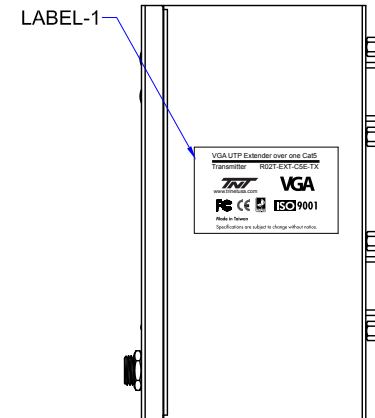

View A

Specification:

1. Extend distance up to 2000 feet from source to last transceiver receiver
2. Support resolution up to 1920 x1440 at any refresh rate
3. Daisy chain each transceiver with one Cat5/6 cable up to 4 transceivers
4. Box style: compact, rigged metal enclosure with clear silk screen indicators
5. Secure AC/DC power adapter with unit by screw type connection
6. Screw driver included to adjust EQ switch at transceiver to tune up best image quality
7. Dimensions: 115(L) x 62.4(W) x 27(H) mm

A	10/06/14	INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.	
DECIMALS	INCHES	MM	UNITS
.x	0.015	0.30	SHEET
.xxx	0.010	0.10	5-2
.xxx	0.005	0.05	DATA
ANGLE : ± 0.5°		VER.	A
		APPD.	CHK.
		DR. Afra	
		Title VGA UTP Extender Daisy Chainable UTP Transceiver Set	
		PART NO R02T-EXT-TR	
		DWG NO R02T-EXT-C5E-TX	