





View A




USB B type JACK
(INPUT)




Housing Label-1



RJ45 JACK





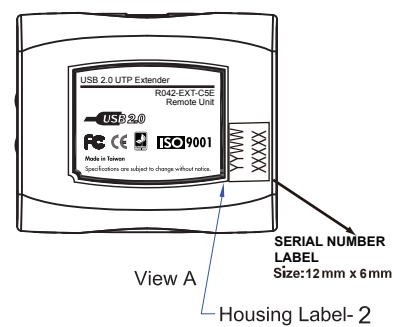
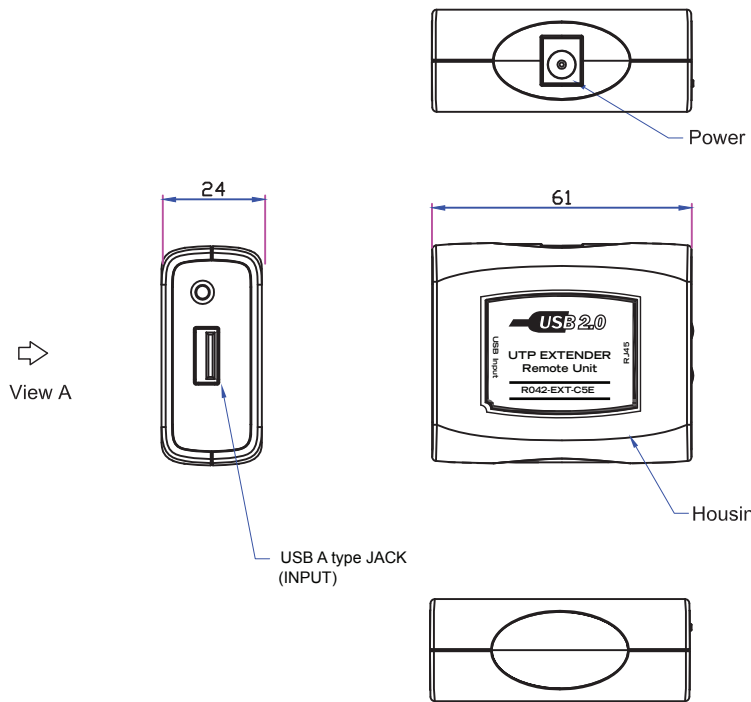
51,79



View A

Housing Label-2

A		INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)		 Tri-Net Electronics Co. Ltd.	
DECIMALS	INCHES	MM	UNITS
.x	0.015	0.30	SHEET
.xx	0.010	0.10	DATA
.xxx	0.005	0.05	VER. A
ANGLE : ± 0.5°		APPR.	CHK. DR. Afra
		Title USB UTP Extender Box style	
		PART NO R042-EXT-C5E	
		DWG NO R042-EXT-C5E	



Power adapter
 Input: 100-240V
 Output: 5V,2A

Description:

Extends an USB 2.0 signals up to 100 meter/ 330 ft using one Cat5e/6 UTP cable.
 This extender supports USB 2.0 device at speed up to 480 Mbps.

Specification:

- Extends transmission distance up to 100 meter / 330 feet
- USB 2.0 compatible
- AC/DC 5V 2A power adapter included
- Supports speed up to 480 Mbps
- Ideal for USB peripherals extension, industrial control, security, digital signage
- Works with Windows XP, Vista, Windows 7

A		INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)		Tri-Net Electronics Co. Ltd.	
DECIMALS	INCHES	MM	UNITS
.x	0.015	0.30	mm
.xx	0.010	0.10	SHEET 5-2
.xxx	0.005	0.05	DATA
ANGLE : ± 0.5°		VER.	A
APPD.		CHK.	DR. Afra
		PART NO	R042-EXT-C5E
		DWG NO	R042-EXT-C5E