





View A




USB B type JACK  
(INPUT)




Housing Label-1



RJ45 JACK




51,79




View A

Housing Label-2


REV	DATE	DESCRIPTION OF CHANGE
A	05/23/11	INITIAL RELEASE
	05/26/11	Revise RJ45 JACK direction
 <b>Tri-Net Technology, Inc.</b> <small>Total Network. Total Service. U.S.A.</small>		
GENERAL TOLERANCE (Unless Specified)		Title <b>USB UTP Extender/Hub</b>
DECIMALS	INCHES	MM
.x	0.015	0.30
.xx	0.010	0.10
.xxx	0.005	0.05
ANGLE : ± 0.5°	APPR.	CHK.
		DR. Afra
		MOD. NO R042-HUB-C5E-104
		SHEET 5-1
		DOC. NO
		DATA 05/26/11
		PART NO
		DWG NO R042-HUB-C5E-104_2S4P_052611
		VER. A

USB A type(X4)




USB LED(X4)


LABEL-1

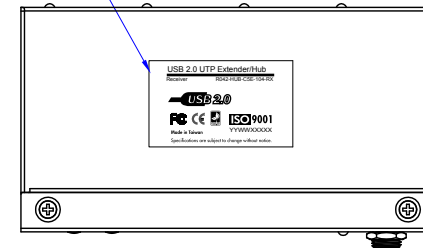


Blowhole




62.4



View A




Surface Mount Bracket



Power adapter  
Input: 100-240V  
Output: 5V,2A

View A

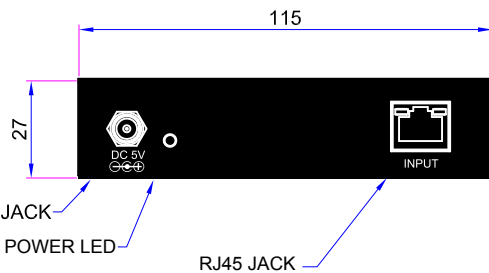

DC POWER JACK

POWER LED

RJ45 JACK

**Specification:**

- Supports USB2.0 at speed up to 480 Mbps.
- Works with Windows XP,Vista,Windows7, Windows Server 2000 & 2003
- Transmitter:input:USB B type female,output:RJ45 jack,plastic enclosure
- Receiver:input:RJ45 jack,output:4 USB A type female,metal enclosure

**Description:**

- Extends the transmission distance up to 100 meter / 330 feet using one Cat5/6 UTP cable
- Ideal for USB peripheral extension,industrial control,security,digital signage
- AC/DC 5V 2A power adapter included
- Built-in 4 ports Hub on receiver



GENERAL TOLERANCE (Unless Specified)			Title: USB UTP Extender/Hub			
DECIMALS	INCHES	MM	UNITS	mm	MOD. NO	R042-HUB-C5E-104
.x	0.015	0.30	SHEET	5-2	DOC. NO	
.xx	0.010	0.10	DATA	05/26/11	PART NO	
.xxx	0.005	0.05	VER.	A	DWG NO	
ANGLE : ± 0.5°			APPD.	CHK.	DR.	Afra