
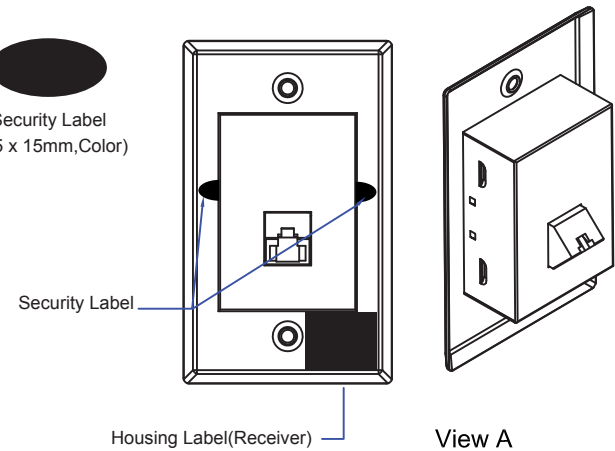



Housing Label(Receiver)
(25 x 19mm,Black on White)


Security Label
(25 x 15mm,Color)






View A

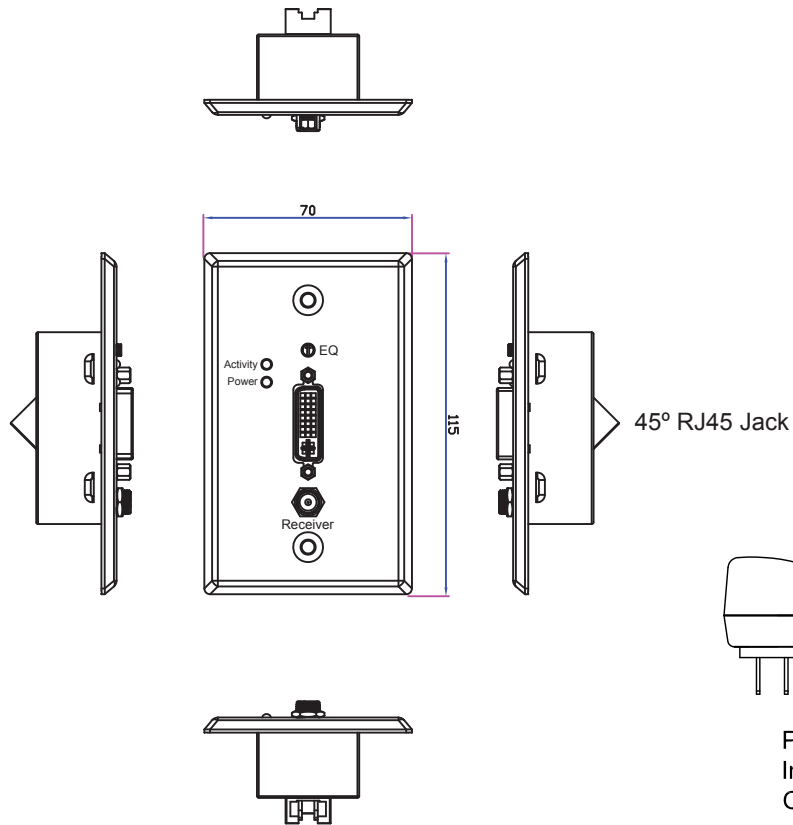

Specification:

1. Receive DVI signal up to 150 feet @1920x1080 in one 24AWG Solid Cat5/6 cable
2. Works with DVI UTP Extended 1x2 and 1x4 SplitterTransmitter
3. No software needed
- 4 Adjust EQ switch to tune up best image quality
5. Secure AC/DC power adapter
6. DVI 1.1 compliant (Bandwidth = 4.95 Gbps)
8. Screwdriver included for EQ adjustment
9. UTP connection/RJ45 jacks come with two LED to indicate power condition and signal activities
10. 1 x RJ45 Jack input / 1 x DVI Female output

A	10/06/11	INITIAL RELEASE			
REV	DATE	DESCRIPTION OF CHANGE			
GENERAL TOLERANCE (Unless Specified)		 Tri-Net Electronics Co. Ltd.			
DECIMALS	INCHES	MM	UNITS	mm	Title
.x	0.015	0.30	SHEET	3-1	DVI UTP Extender Active 45° RJ45 Jack Receiver Wallplate
.xx	0.010	0.10	DATA	10/06/11	PART NO R05-EXT-DSL-RX-JP
.xxx	0.005	0.05		VER. A	DWG NO R05-EXT-DSL-RX-JP
ANGLE : ± 0.5°		APPD.	CHK.		DR. Afra