


RJ45 CONNECTOR  
(OUTPUT)




DC POWER JACK


Blowhole




62.4

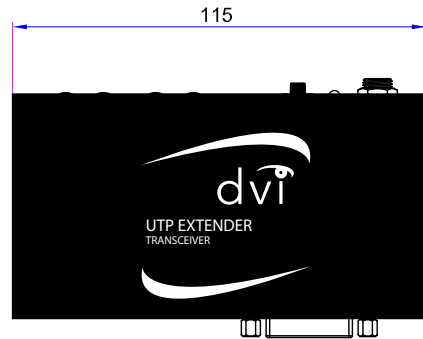


115



View A



Surface Mount Bracket

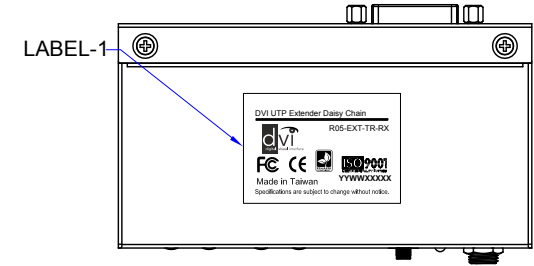


LABEL-1

View A



27

DVI JACK



Power adapter  
Input: 100-240V  
Output: 5V,2A

**Description:**

Extends and daisy chains DVI signals up to **150 feet** each chain with at least 4 transceivers in ONE inexpensive CAT5e/6 Cable.

**Specifications:**

- Extends distance up to 150 feet each chain
- Adjusts EQ & Gain switch at transceiver to obtain best image quality of display.
- Daisy chains each transceiver using ONE Cat5/6 cable
- Allows to cascade up to 4 transceivers in one chain
- Supports resolutions up to 1920x1080 at any refresh rate
- 2 pieces of surface mount brackets included
- Power adapter 5V DC included

A		INITIAL RELEASE	
REV	DATE	DESCRIPTION OF CHANGE	
GENERAL TOLERANCE (Unless Specified)			
DECIMALS	INCHES	MM	UNITS
.x	0.015	0.30	mm
.xx	0.010	0.10	SHEET 4-1
.xxx	0.005	0.05	DATA
ANGLE : ± 0.5°		VER.	A
APPD.		CHK.	DR. Afra