


REV	DESCRIPTION	DATE:	APP'D
A	FOR PRODUCTION	02/09/11	



P/N: 800-DLC-DSC-S-XX-YL

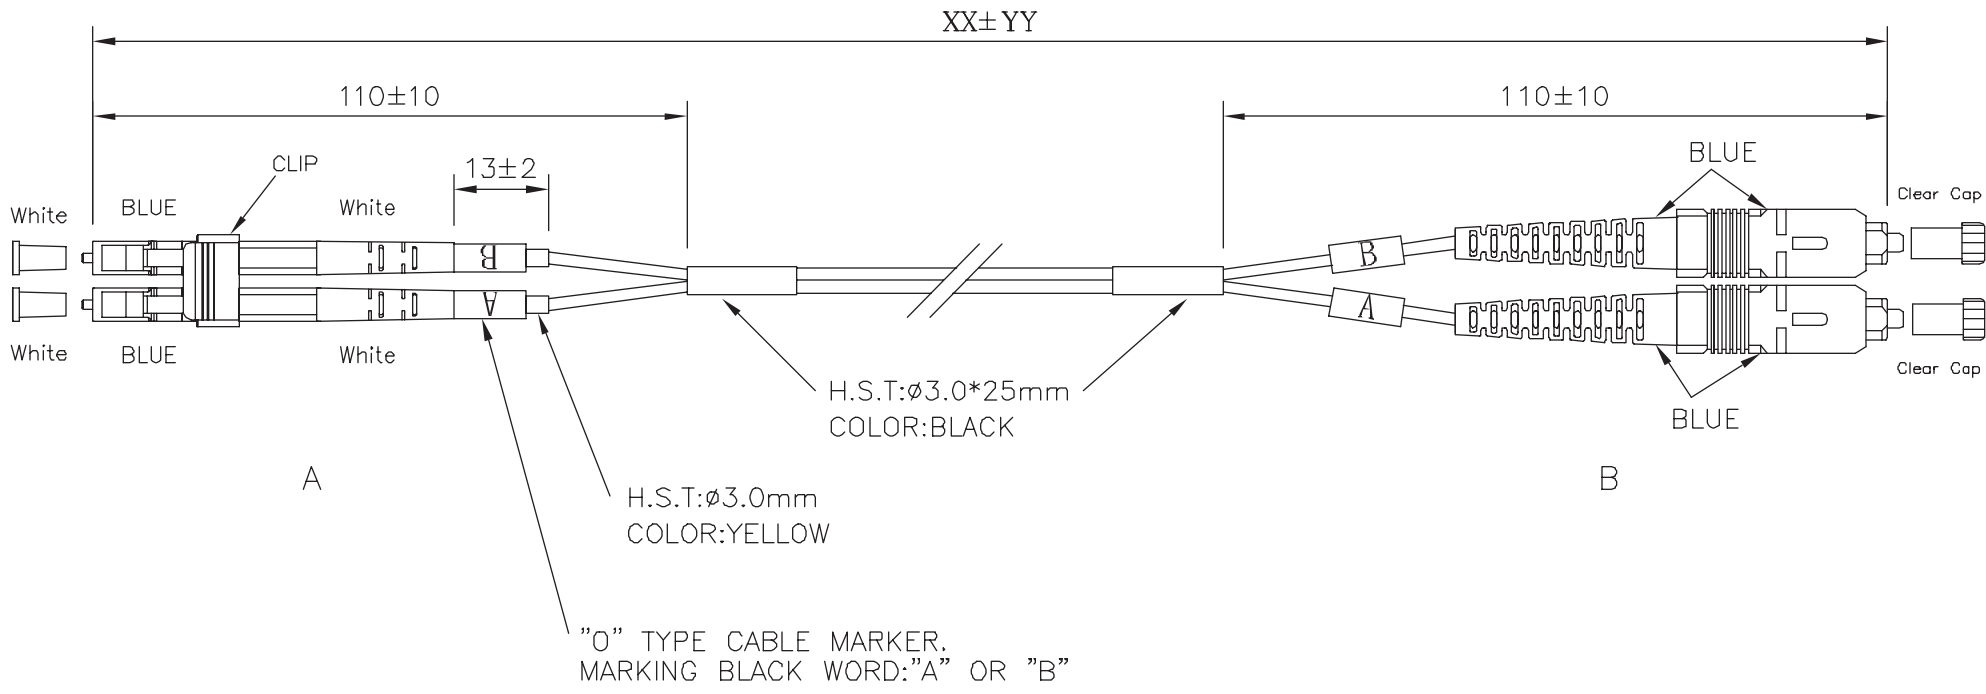

XX	YY
XX ≤ 1M	±50mm
XX > 1M	±100mm



Specification:

- | | | | |
|-------------------|--|-----------------|--------------|
| 1. Connector A | LC/PC S/M | P/N: 880-LC-S-C | BOOT:WHITE |
| 2. Connector B | SC/PC S/M | P/N: 880-SC-S-C | BOOT:BLUE |
| 3. Cable Type | Duplex ∅1.8mm | 9.0/125um | Single-Mode. |
| 4. Length | XX(UNIT:METER) | | |
| 5. Jacket Color | Yellow. | | |
| 6. Insertion Loss | <0.40 dB | | |
| 7. Return Loss | >50 dB | | |
| 8. PACKING | EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG(08*8"*10").
BAR CODE LABEL TO BE ADHERED ON POLY-BAG. | | |

TOLERANCE			TNT Tri-Net Technology		
INCHES	M/M				
.X	.015	.30	TITLE: Single-Mode Duplex LC-SC		
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY			PART NO.: 800-DLC-DSC-S-XX-YL		
CHECK BY			SCALE: NONE	DRAWING NO.:	REV
APPD BY			UNIT: MM	TNT-0061	A
			DATE: 02/09/11		