


REV	DESCRIPTION	DATE:	APP'D
A	FOR PRODUCTION	02/09/11	



P/N: 800-DLC-DST-M-XX-OR

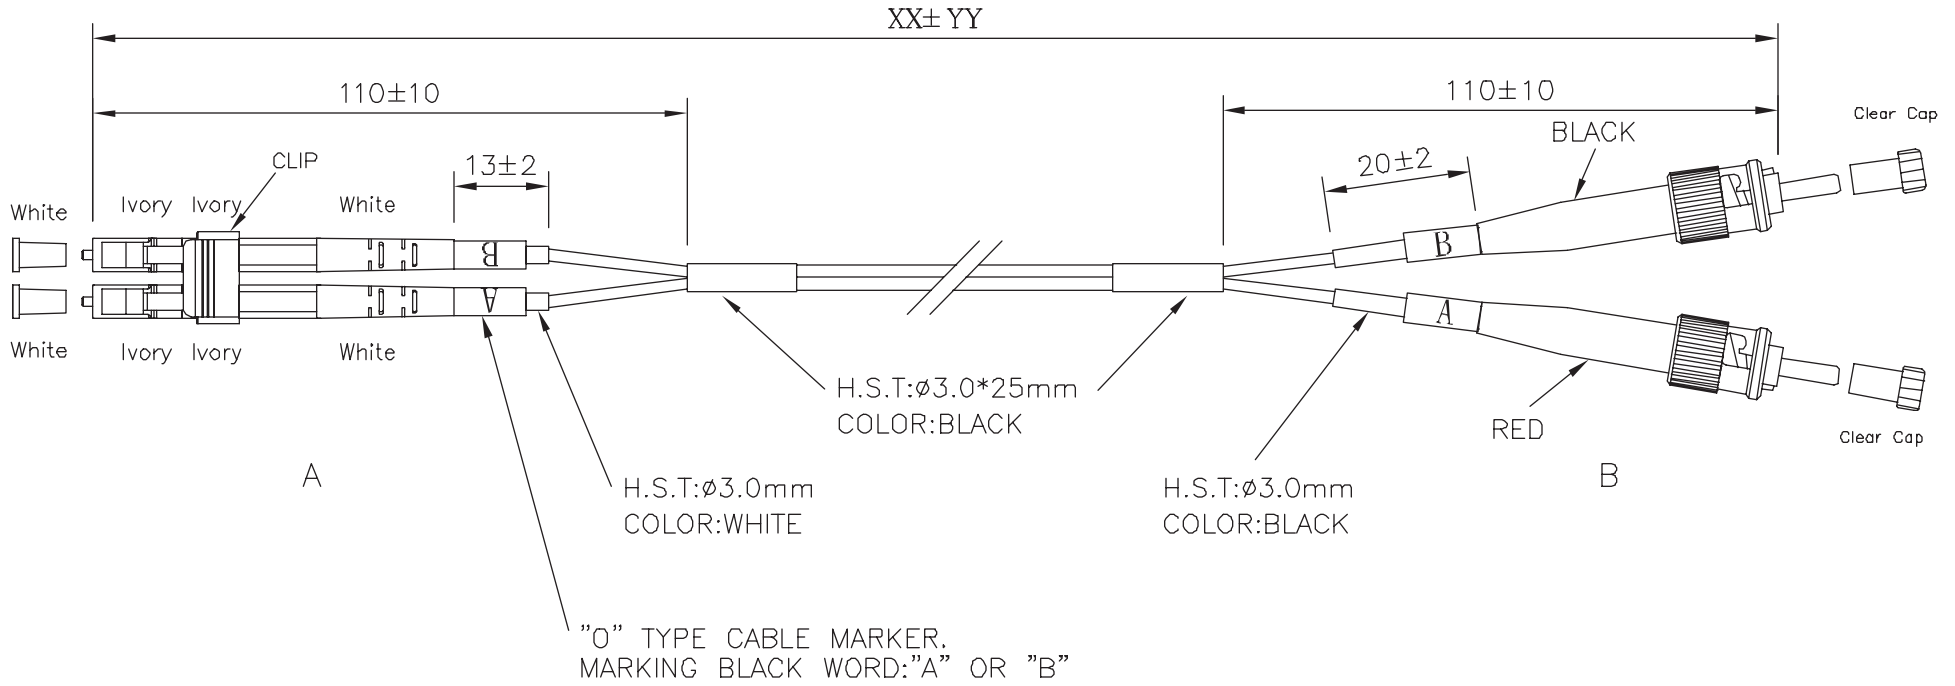

XX	YY
XX ≤ 1M	±50mm
XX > 1M	±100mm



**Specification:**

- |                   |   |                 |                |
|-------------------|---|-----------------|----------------|
| 1. Connector A    | LC/PC M/M   | P/N: 880-LC-M-C | BOOT:WHITE     |
| 2. Connector B    | ST/PC M/M   | P/N: 880-ST-M-C | BOOT:RED,BLACK |
| 3. Cable Type     | Duplex ø1.8mm 62.5/125um Multi-Mode.  |                 |                |
| 4. Length         | XX(UNIT:METER)  |                 |                |
| 5. Jacket Color   | Orange.   |                 |                |
| 6. Insertion Loss | <0.20 dB  |                 |                |
| 7. PACKING        | EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG(08*8*10").<br>BAR CODE LABEL TO BE ADHERED ON POLY-BAG. |                 |                |

TOLERANCE			TNT Tri-Net Technology			
INCHES	M/M					
.X	.015	.30	TITLE: Multi-Mode Duplex LC-ST			
.XX	.010	.10	PART NO.: 800-DLC-DST-M-XX-OR			
.XXX	.005	.05				
DRAWN BY			SCALE	NONE	DRAWING NO.:	REV
CHECK BY			UNIT	MM	TNT-0062	A
APPD BY			DATE	02/09/11		