



# Tri-Net Technology, Inc.

## Total Network Telesis U.S.A


21709 Ferrero Parkway, Walnut, CA 91789  
 Tel: 909.598.8818 Fax: 909.594.8666 Toll Free: 1.888.598.8818  
 Website: www.trinetusa.com E-mail: info@trinetusa.com

### FIBER CABLE SPECIFICATION

**P/N: 820-4C-MM-OR**

Title: 4core Multimode 62.5/125u, Indoor type, tight buffered, Rohs PVC fiber optic cable

Cabel Structure:

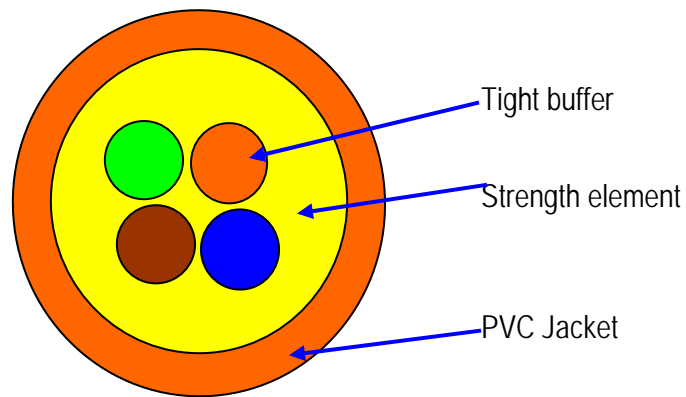

Cabel Description:

No. of fiber	4*62.5/125u MM fiber
Tight buffer color	blue/orange/green/brown
Tight buffer OD	0.87±0.05mm
Tight buffer thickness	0.31±0.02mm
Strength element	kevlar:9*1580dtex
Outer jacket OD	4.8±0.1mm
Outer jacket thickness	0.7±0.15mm
Material of outer jacket	ORANGE COLOR Rohs PVC

**Other demanding:**

1- Appearance

Slickness, without color difference and bumps, no color transparent

2- Package

Wooden reel

3- Length

More than 500 meters, other length upon negotiation with customers

4- Test Report

Attached with OTDR test and the labeled with the style of fiber

5- Cable Print

**GJFJV 4A1b(62.5/125) MM-4.8 MMDDYYXX(XX=LOT#) RoHS E312942 (UL) OFNR XXXXM**

**Application:**

Temperature range		°C	-20°C -- +70°C
Nominal weight		g/m	19
Min. Bending radius	Install	mm	20H
Min. Bending radius	Static	mm	10H
Max. Tension	Short-term	N	600
Max. Tension	Long-term	N	200
Max. Crush resistance		N/100mm <sup>2</sup>	1000

**APPROVAL:**

**CHECK:**

**DRAWN:** Michael