

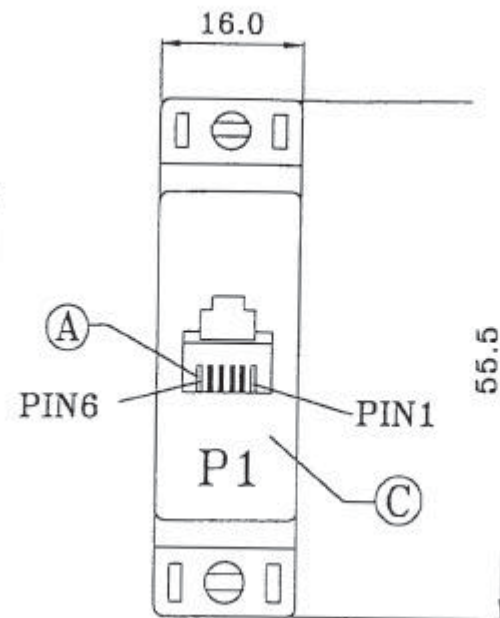


DB25F

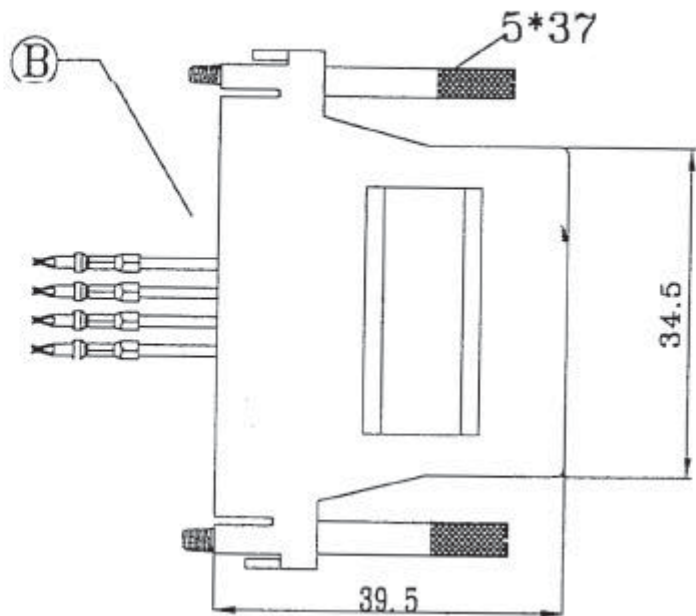

P2



P1 P2

- 2 (3) ——— BLACK
- 3 (4) ——— RED
- 4 (5) ——— GREEN
- 5 (6) ——— YELLOW



D		DB25 F BLACK	PCS	1
C	JACK	RJ12 JACK 6P4C ABS 94V-2 GREY	PCS	1
B	WIRE	UL#1061 26AWG 65MM.	PCS	4
A	GOLD WIRE	13MM;15MM GOLD FLASH.	PCS	4
ITEM NO	ITEM	DESCRIPTION	UNIT	QTY

TOLERANCE GENERALES											
PLASTIC DIMENSION	0	11	26	41	61	81	121	160	250	CABLE LENGTH	X
tolerance(±)	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50	0.55	tolerance(±)	2%
CHECKED	Rebin	DRAW	Hangkaihua	UNIT	MM						
INSPECTED	Zhou	CUS.PART NO.	500-D25-4FK-XX	SCALE	1.5:1						
APPROVED	Thomas SA	CUSTOMER	華網	DATE	02/05/30						
TITLE	TL011AX641NX0/25P										
DRAWING NO.	S3265	REV	A	Tri-Net Technology, Inc.							