




DB25M

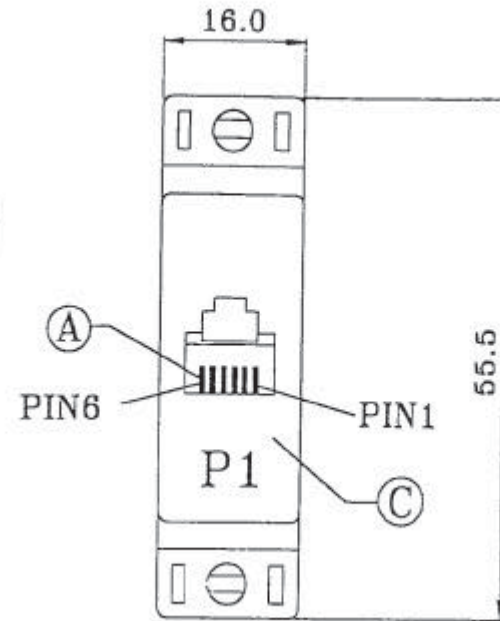

P1	P2		
1	(2)	WHITE	
2	(3)	BLACK	
3	(4)	RED	
4	(5)	GREEN	
5	(6)	YELLOW	
6	(7)	BLUE	

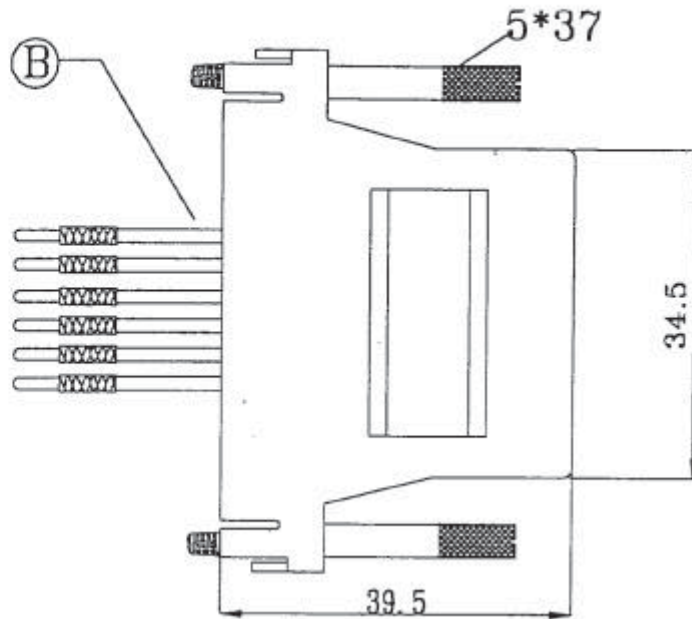

ITEM NO	ITEM	DESCRIPTION	UNIT	QTY
D		DB25 M BLACK	PCS	1
C	JACK	RJ12 JACK 6P6C ABS 94V-2 GREY	PCS	1
B	WIRE	UL#1061 26AWG 65MM.	PCS	6
A	GOLD WIRE	13MM;15MM GOLD FLASH.	PCS	6

TOLERANCE GENERALES											
PLASTIC DIMENSION	0-10	11-25	26-40	41-60	61-80	81-100	121-160	160-250	250 以上	CABLE LENGTH	X
tolerance(±)	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.50	0.55	tolerance(±)	2%
CHECKED	H. B. 5/1		DRAW		Wang Kaihua		UNIT		MM		
INSPECTED	Zhou		CUS.PART NO.		500-D25-6MK-XX		SCALE		1.5:1		
APPROVED	Thomas		CUSTOMER		聯網		DATE		02/05/30		
TITLE	TL011AX881NX0/25M										
DRAWING NO.	S3264	REV	A								

Tri-Net Technology, Inc.