WIRING CONFIGURATION

LEGS #	RJ-45 PIN#	TELCO PIN #	50 PIN CONNECTOR COLOR CODE
1	1	26	White/Blue
	2	1	Blue/White
	3	27	White/Orange
	6	2	Orange/White
2	1	28	White/Blue
	2	3	Blue/White
	3	29	White/Orange
	6	4	Orange/White
3	1	30	White/Blue
	2	5	Blue/White
	3	31	White/Orange
	6	6	Orange/White
4	1	32	White/Blue
	2	7	Blue/White
	3	33	White/Orange
	6	8	Orange/White
5	1	34	White/Blue
	2	9	Blue/White
	3	35	White/Orange
	6	10	Orange/White
6	1	36	White/Blue
	2	11	Blue/White
	3	37	White/Orange
	6	12	Orange/White
7	1	38	White/Blue
	2	13	Blue/White
	3	39	White/Orange
	6	14	Orange/White
8	1	40	White/Blue
	2	15	Blue/White
	3	41	White/Orange
	6	16	Orange/White
9	1	42	White/Blue
	2	17	Blue/White
	3	43	White/Orange
	6	18	Orange/White
10	1	44	White/Blue
	2	19	Blue/White
	3	45	White/Orange
	6	20	Orange/White
11	1	46	White/Blue
	2	21	Blue/White
	3	47	White/Orange
	6	22	Orange/White
12	1	48	White/Blue
	2	23	Blue/White
	3	49	White/Orange
	6	24	Orange/White

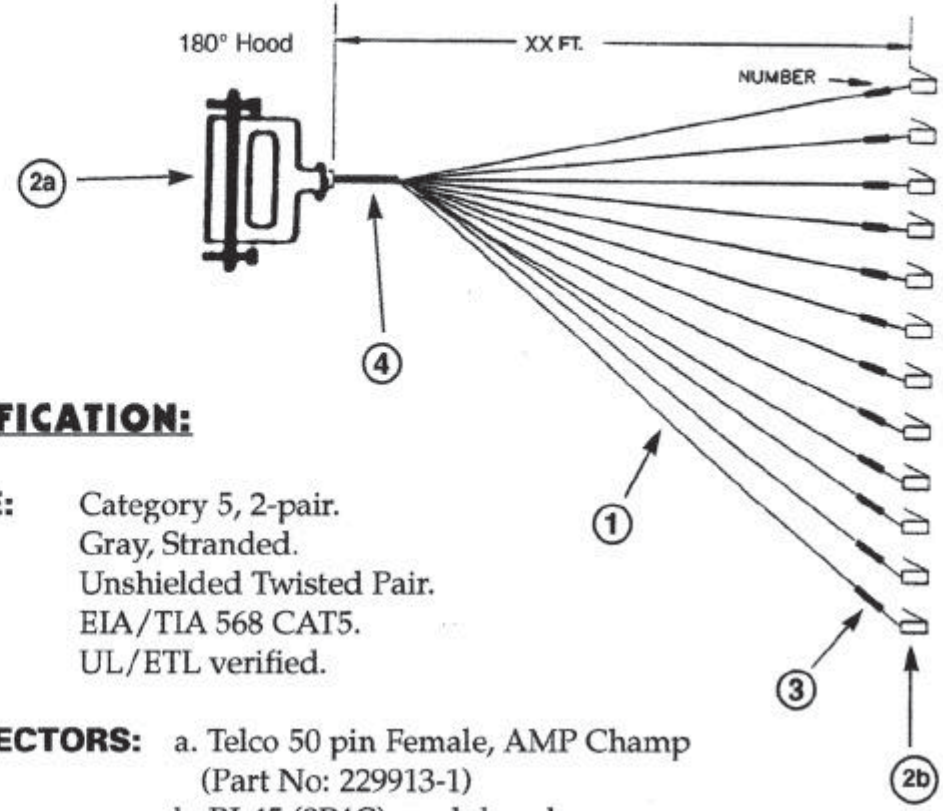

SPECIFICATION:

① **CABLE:** Category 5, 2-pair.
Gray, Stranded.
Unshielded Twisted Pair.
EIA/TIA 568 CAT5.
UL/ETL verified.

② **CONNECTORS:** a. Telco 50 pin Female, AMP Champ (Part No: 229913-1)
b. RJ-45 (8P4C) modular plug.

③ **NUMBERING:** Number on each leg (#1 -- #12).

④ Heat shrinkable tube, Black, 2.5".

XX = Length of Leg (ft)

RoHS COMPLIANT

Tri-Net Technology, Inc.
Total Network Telesis U.S.A.

DESCRIPTION: 4 WIRE 12 LEGS OCTOPUS CABLE. Female Telco 50 Pin, 180° Hood.

PART NO: 035-412-F1-84-T-XX