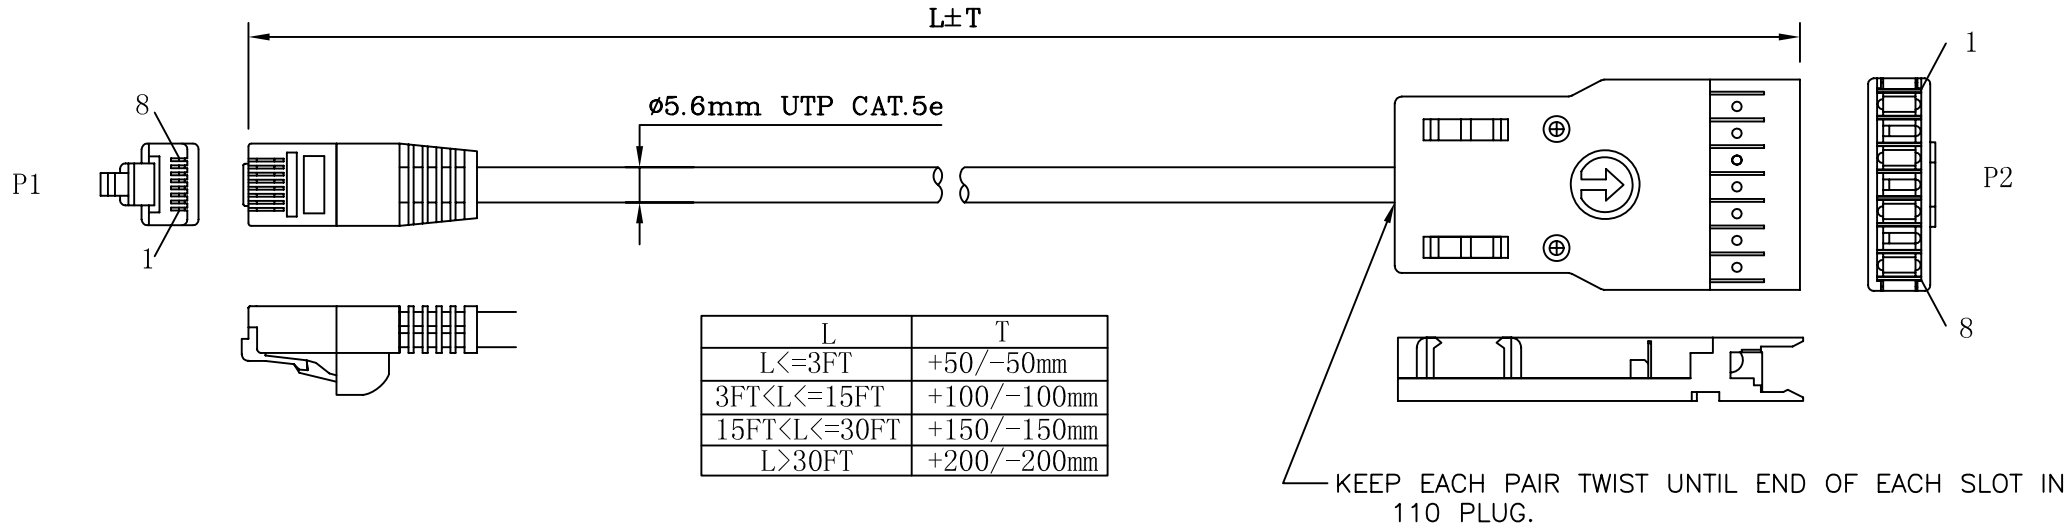

L	T
L<=3FT	+50/-50mm
3FT<L<=15FT	+100/-100mm
15FT<L<=30FT	+150/-150mm
L>30FT	+200/-200mm

097-845-A-XX-YY-05BR

- YY: COLOR:BLACK,RED,YELLOW, GREEN,BLUE,GRAY,WHITE.
- XX: Length unit:FT

APPROVED BY

COMPANY: _____

PURCHASING/ENGINEER: _____

DATE: _____

WIRE CONNECTION

WIRE COLOR	P1	PAIRS	P2
WHITE/ORANGE	1	———	3
ORANGE	2	———	4
WHITE/GREEN	3	———	5
BLUE	4	———	2
WHITE/BLUE	5	———	1
GREEN	6	———	6
WHITE/BROWN	7	———	7
BROWN	8	———	8
WIRING	568B	———	568B

REMARK:

1. CABLE: UTP CAT.5e CABLE.4P*24AWG(7/0.205)(BARE COPPER.INSULATION:HD-PE.OD:0.98±0.05mm) +OUTER JACKET:PVC,OD:5.6±0.2mm. P/N: 06F-R4P-T24-XX.
2. CONN.: P1,8P8C MODULAR,,SHORT BODY,DOUBLE LAY,GOLD PLATED 50u". P/N:05BR(060-F88-T50-SB-STG) P2,4 PAIR 110 PATCH PLUG,ASSEMBLY,TRANSPARENT BODY, P/N:094-4
3. KEEP EACH PAIR TWIST UNTIL END OF EACH SLOT IN 110 PLUG.
4. HOOD:MOLDING 90P PVC.
5. CABLE ASS'Y MUST PASS CONTINUITY TEST.
6. MOLD NO:88-03.

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	11/01/07

TOLERANCE INCHES		M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Tri-Net Technology,Inc.
http://www.trinetusa.com

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	11/01/07		
DRAWN BY	Walt		
CHECK BY		TITLE	8P8C RJ45 TO 4pair 110 patch cords
APPD BY		PART NO.	097-845-A-XX-YY-05BR

RoHS COMPLIANT

QP-05-02-G