
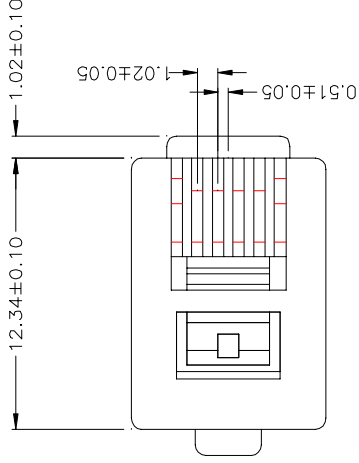



NOTES:

1. ALL DIMENSIONS ARE "MM".
2. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 INSULATION RESISTANCE: 500 MEGOHMS.
 TERMINATION RESISTANCE: 35 MILLIOHMS MAX
 AFTER ENVIRONMENTAL TESTING.
3. MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 20 lbs (89N) MIN
 DURABILITY: 200 MATING CYCLES.
4. MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, VL94-2.
 CONTACT: HIGH STRENGTH COPPER ALLOY.
 6u" GOLD PLATING OVER 100 MICRO INCH
 NICKEL..

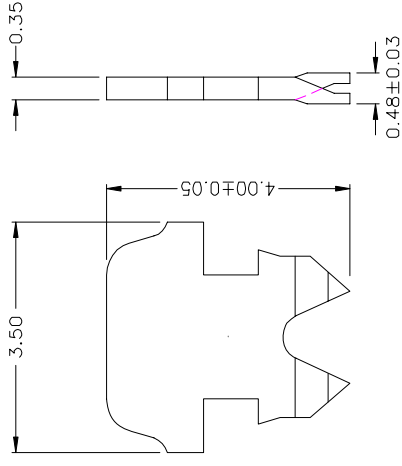

CONDUCTOR: SOLID. 24, 26, 28 AWG.

 Tri-Net Technology, Inc. http://www.trinetusa.com		ITEM NO : 060-R64-S-6	
		DSGN	SUNNY
CHK		SCALE	3 / 1
APPR		DATE	2002.02.10