


UNC #4-40 Hexscrew UNC #4-40 Hexnut

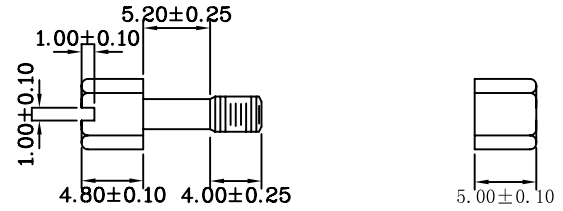

MA 004A (DB25M/F ADAPTOR)

PIN OUT: 25Male

25Female

1	-----	1
2	-----	3
3	-----	2
4	-----	5
5	-----	4
6	-----	20
8	-----	
7	-----	7
20	-----	6
	-----	8
G	-----	G

Label: orange color with white character

One side: NULL MODEM

The other side: MINI ADAPTER.

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 500V AC for one minute

INSULATOR RESISTANCE: 500M Ω min at 500V DC

TEMPERATURE: -25°~+105°.



TOLERANCE		INCHES		M/M		TNT Tri-Net Technology, Inc. http://www.trinetusa.com			
.X	.015	.10	.30	SCALE	NONE		REV	A	DWG NO.
.XX	.010	.10	.10	UNIT	MM				
.XXX	.005	.05	.05	SHEET	1/1				
DRAWN BY		DATE	11/27/05	TITLE					
CHECK BY		MA 004A (DB25M/F ADAPTOR)							
APPD BY		PART NO. A15-D25M-25F							