


NOTE:

1. CABLE: 28AWG X 4C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (CTG-401) PVC JACKET.
2. CONNECTOR: P1: MINI DIN 6PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS; P2: DIN 5PIN MALE: SOLDER TYPE, NICKEL PLATED CONTACTS.
3. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
4. ALL HOOD: MOLDED BEIGE(CTG-401) PVC.
5. PACKING: EACH CABLE IN A TNT PRINTED ZIP-LOCK POLY-BAG. LABEL (ORANGE BACKGROUND WITH BLACK LETTERS, CODE: 39) TO BE STAMPED ON POLYBAG.

PIN OUT

MD6F	————	DN5M
5	————	1
1	————	2
3	————	4
4	————	5
SHELL	————	SHELL(DRAIN WIRE)

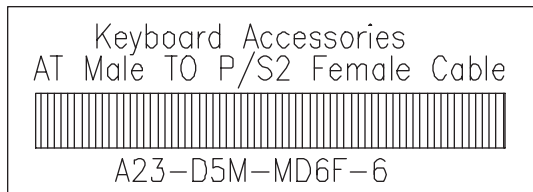

DRAWING APPROVED _____		DATE: _____	
SAMPLE APPROVED PER _____		DRAWING SPECIFICATIONS _____	
DATE: _____			
PROPRIETARY & CONFIDENTIAL. THIS DOCUMENT MAY NOT BE COPIED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF TNT.			
	mm	TITLE	MD6F/D5M
SCALE	NONE	CUS. NAME	
SHEET	1/1	CUS. P/N	A23-D5M-MD6F-6
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		PART NO.	P9907035-E
<input type="checkbox"/> 0	.X ± 0.2	.XX ±	
<input type="checkbox"/> S	.XXX ±	ANGLES ±	
REV.	∅	CUS. REV	A

ENG.	DATE
CHECKED	DATE
APPROVED	DATE

