



9.80±0.10

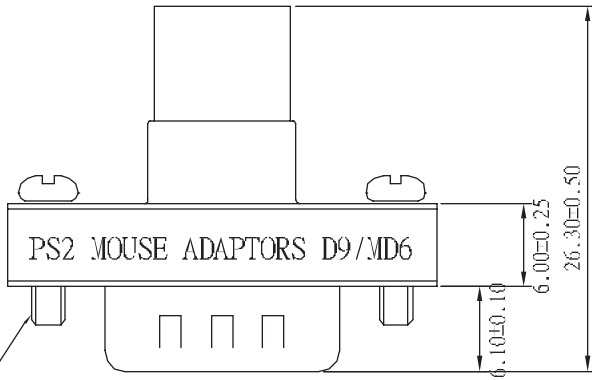

UNC #4-40

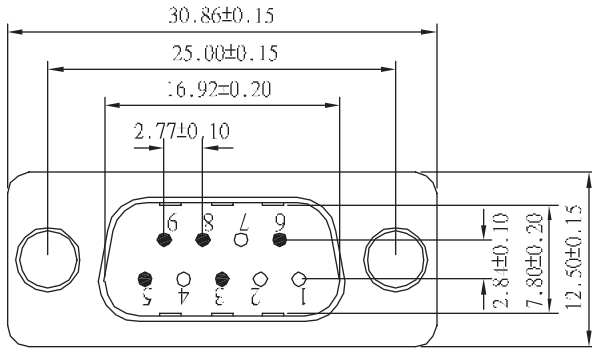

MA 007A (DB9M/MD6F ADAPTOR)

PIN OUT: 09Male 06Female

3	-----	3
6	-----	
5	-----	4
8	-----	5
9	-----	1
G	-----	G

Label: orange color with white character

One side: PS2 MOUSE ADAPTORS D9/MD6

The other side: R.O.C. PATENT 105471

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 500V AC for one minute

INSULATOR RESISTANCE: 500MΩ min at 500V DC

TEMPERATURE: -25°C — +105°C



				Edition	<b>Tri-Net Technology/USA</b>				
				A0	<small>UNLESS OTHERWISE SPECIFIED TOLERANCE: 0.0: ±0.20 0.30: ±0.25 0.300: ±0.35</small>	PART NO.	DWG NO.	DATE	
				SCALE		A24-DB9M-MD6F-S	TMO066-01	05.11.00	
				2:1					
				UNIT	mm				
Customer	REVISION	DESCRIPTION	DATE	Page	1/1	DRAWN	<i>Fu Hao</i>	CHECKED	APPRD